

WPDCH

Large diameter (Ø45 ~ Ø180) Indexable Drill

- Cartridge type with adjustable drill diameter allows for free adjustment of machining depth
- Enhanced wear resistance and durability with a forged and specially surface-treated drill body



Large diameter (Ø45~Ø180) Indexable Drill

WPDCH

KORLOY has launched WPDCH, an indexable drill for large diameter hole machining (Ø45~Ø180).

Economical and efficient hole making are the crucial factors in the manufacturing industry, and WPDCH, with a wide range of adjustable depth and diameter, meets these demands and provides an optimal machining solution.

One of the biggest features of **WPDCH** is the adoption of a cartridge-type design. This significantly enhances the tool life of the drill body while allowing for machining diameter adjustment. Therefore, a single body can handle drill work of various sizes, reducing maintenance costs. Furthermore, cartridge replacement allows for quick configuration of the optimal combination for the machining environment, maximizing work efficiency.

Based on high durability and flexibility, WPDCH improves machining performance and reduces maintenance costs. It offers a longer tool life than existing drills by extending replacement cycles and reduces the need for additional equipment, as it can machine various of diameters with a single body.

Therefore, WPDCH provides customer satisfaction as an innovative machining solution for precise and economical machining environments.

» Wide machining range

- Optimal for various working environments with flexible adjustment of machining depth (Supports diameters from Ø45 to Ø180)

» High durability and cost reduction


- Improved economic efficiency through reduced maintenance costs and extended holder replacement cycles

» Cartridge type design

- Extended tool life of drill body
- Adjustable machining diameter by simply replacing the cartridge

» Enhanced Productivity



- Maximized work efficiency and convenience by machining various diameters with a single holder

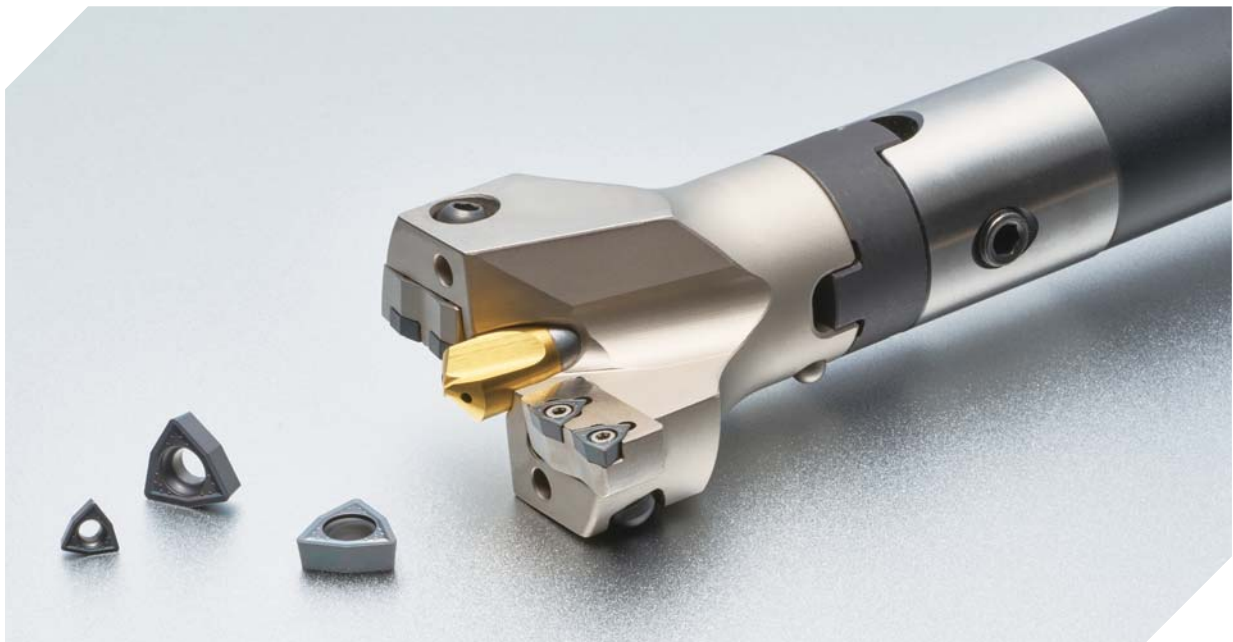

Code system

Head				
WPDC		H		045050
Application of W type insert Center drill attachment Indexable drill		Division H: Head		Cutting range Ø45~Ø50 mm
Cartridge				
CWP	2	-	045050	C
Cartridge Application of W type insert Center drill attachment	No. of insert		Cutting range Ø45~Ø50 mm	Division C: Central P: Peripheral
				(-Ø485)
				Peripheral drill diameter Ø48.5 mm
Holder				
WPDC	D	28	13	10
Application of W type insert Center drill attachment Indexable drill	Division D: Drive ring E: Extension R: Reducer A: Adaptor	Connection Moduler Machine Side 28: Ø28 mm	Connection Diameter Machine Side 13: Ø13 mm	Available length 10: 10 mm 115: 115 mm
Center drill			Grade	
CD	H	1035	PC	40H
Center drill	Oil hole H: O None: X	Diameter × length 0630: Ø6 × Ø30 mm 0835: Ø8 × Ø35 mm 1035: Ø10 × Ø35 mm 1238: Ø12 × Ø38 mm 1645: Ø16 × Ø45 mm	Coated PVD coating	Coating layer 40H: HSS + TiN coating

Application range

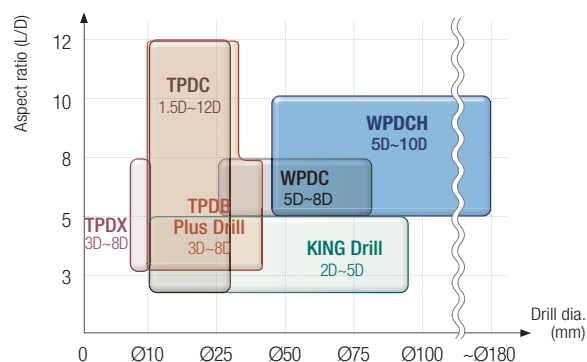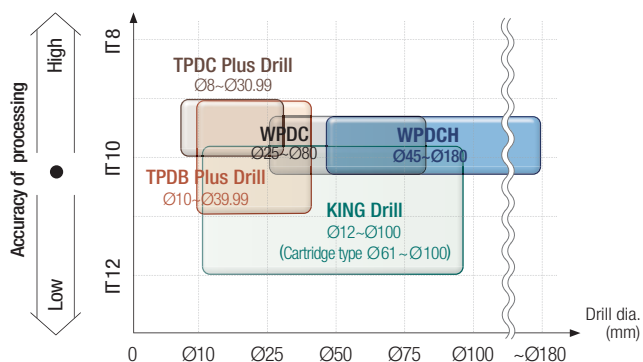


✓ Features

- Cartridge type with adjustable drill diameter allows for free adjustment of machining depth.
- Enhanced wear resistance and durability with a forged and specially surface-treated drill body.



✓ Holder design

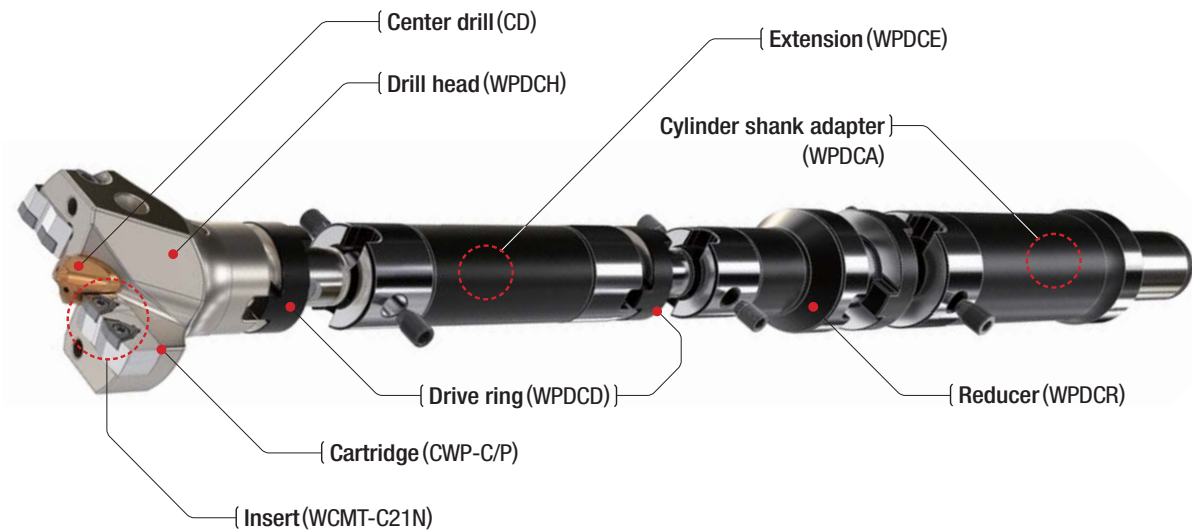


Grade features

PC5335

- Excellent machining stability due to high toughness ultra-fine substrate
- Enhanced cutting due to high lubricated coating layer with welding resistance remove
- Optimal and general grade in various drilling

Applying exclusive PVD coating KROEX-Tech™ and optimal substrate in drilling

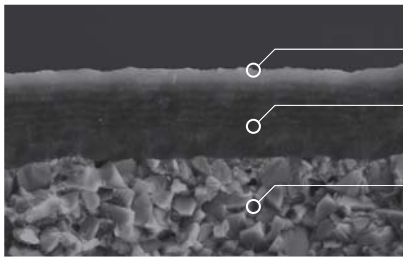

- Good welding resistance by applying lubricated coating layer
- Balance of wear resistance and chipping resistance from high hardness layer and high toughness layer
- Good fracture resistance and cutting stability due to optimal high toughness substrate in drilling


Point polishing-Tech™

- Cutting stability by point polishing tech, special cutting edge treatment technology



[PC5335]

» Stable shape of cutting edge

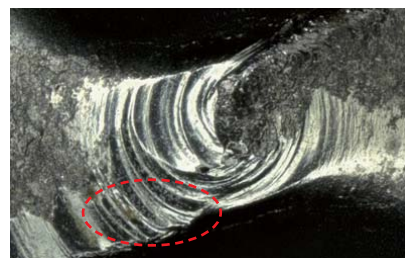


[Competitor]


» Fracture of cutting edge due to brittleness wear

Application range


P Steel

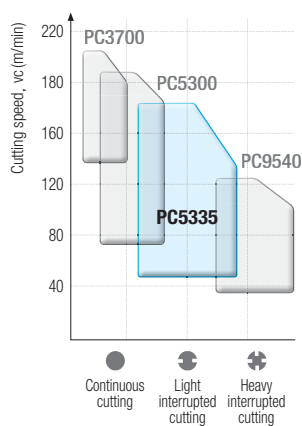


M Stainless steel

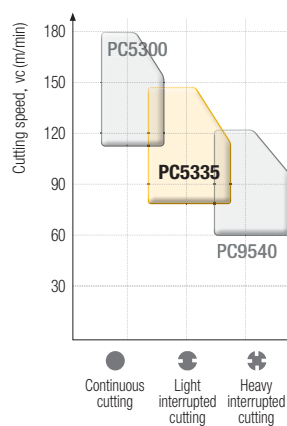


K Cast iron

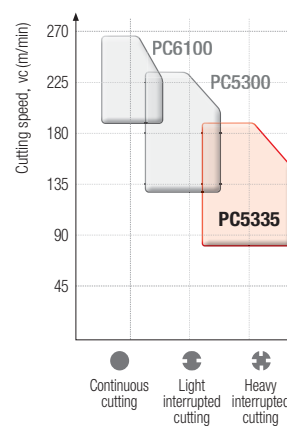

S HRSA

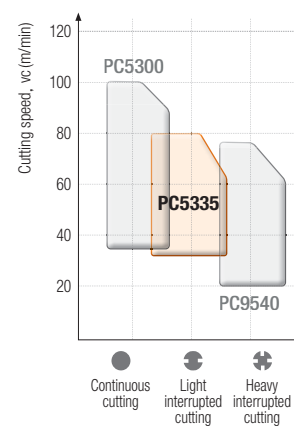

✓ How to clamp the center drill

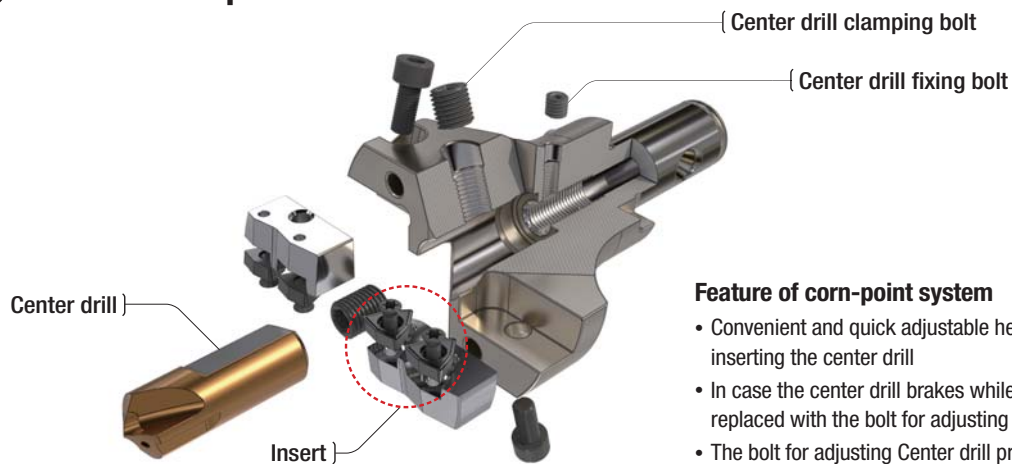

Feature of corn-point system

- Convenient and quick adjustable heights when inserting the center drill
- In case the center drill brakes while in usage, it can be replaced with the bolt for adjusting Center drill
- The bolt for adjusting Center drill prevents chattering on the center drill

✓ Clamping sequence of center drill



- ① Adjust the height of the center drill with the adjustment bolt



- ② First, insert the center drill, then clamp the cartridge



- ③ Clamping the insert
- Check the center drill's clamping length
- Tighten the center drill fixing bolt




- ④ Firmly tighten the center drill with the clamping bolt

※ Use safety covers for your safety when clamping the center drill and insert
※ When machining, be careful of the drill disk

※ **Note:** Be careful to avoid contract damage between the insert and center drill

✓ Center drill clamping length


- If the length of the center drill is set too short, issues such as poor surface finish and increased load can occur. If it is set too long, problems like reduced tool life and vibration during through-hole drilling may arise.

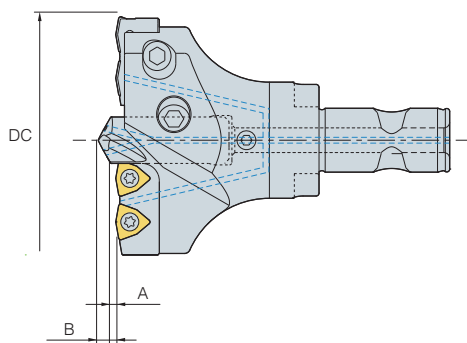

DC (mm)	2~4 × D		4~6 × D		6~8 × D	
	A	B	A	B	A	B
Ø45 ~ Ø55	1.6	4	1.8	4.2	2	4.4
Ø55 ~ Ø75	1.8	5.4	2	5.6	2.2	5.8
Ø75 ~ Ø100	2.2	6.5	2.5	6.8	2.8	7.1
Ø100 ~ Ø120	2.4	7.7	2.8	8.1	3.2	8.5
Ø120 ~ Ø170	3.2	9.9	3.6	10.3	4	10.7
Ø170 ~ Ø180	3.5	12.2	3.9	12.6	4.3	13

✓ Adjusting diameter of cartridge type drill

- Disassemble a cartridge from the holder by loosening the bolt fixed for Peripheral cartridge
- Machine after calculating the hole size on the side of the peripheral cartridge
- Trim the sharp part after machining
- Clamp the bolt for fixing cartridge without any gap in between the holder and machined peripheral cartridge






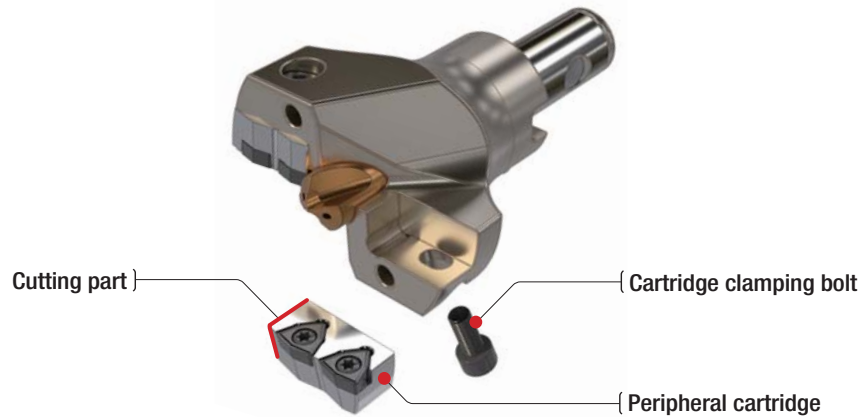


※ When setting WPDCH065070 to $\varnothing 66$ mm, Since the base diameter is $\varnothing 70$ mm, the difference is $\varnothing 70$ mm - $\varnothing 66$ mm = 4 mm.
Calculated as a radius ($4 \text{ mm} \div 2$), this means you cut by 2 mm.


✓ Recommended cutting conditions

ISO	Workpiece	vc (m/min)	fn (mm/rev)						
	Workpiece material		$\varnothing 45 \sim \varnothing 55$	$\varnothing 55 \sim \varnothing 60$	$\varnothing 60 \sim \varnothing 75$	$\varnothing 75 \sim \varnothing 100$	$\varnothing 100 \sim \varnothing 105$	$\varnothing 105 \sim \varnothing 150$	$\varnothing 150 \sim \varnothing 180$
P	Low carbon steel < 0.25%	120~180	0.06~0.1	0.07~0.11	0.08~0.12	0.08~0.14	0.08~0.18	0.08~0.12	0.1~0.14
	High carbon steel $\geq 0.25\%$	110~170	0.06~0.1	0.07~0.11	0.08~0.12	0.1~0.14	0.1~0.18	0.1~0.18	0.1~0.14
	Low alloy steel $\leq \text{HB300}$	90~130	0.06~0.1	0.07~0.11	0.08~0.12	0.1~0.14	0.12~0.18	0.12~0.18	0.1~0.14
	High alloy steel > HB300	60~100	0.05~0.07	0.05~0.07	0.06~0.08	0.06~0.08	0.09~0.13	0.06~0.08	0.06~0.1
M	Stainless steel	60~110	0.04~0.07	0.04~0.11	0.06~0.12	0.08~0.14	0.1~0.18	0.06~0.12	0.08~0.14
K	Gray cast iron	120~180	0.07~0.13	0.07~0.15	0.08~0.16	0.1~0.18	0.12~0.22	0.08~0.16	0.1~0.18
	Ductile cast iron	100~180	0.04~0.13	0.07~0.15	0.08~0.16	0.1~0.25	0.12~0.26	0.08~0.16	0.1~0.25
N	Aluminum forging alloys	180~280	0.04~0.06	0.07~0.12	0.08~0.13	0.09~0.15	0.12~0.2	0.08~0.13	0.09~0.15
	Aluminum casting alloys	120~270	0.04~0.06	0.06~0.12	0.08~0.13	0.09~0.15	0.12~0.2	0.08~0.13	0.09~0.15


Precaution in Drilling

Worn part	How to check	Description
		>> In the case that there is bigger hole than center drill diameter, or protruded part, there could be damage to the center drill and insert by hard vibration.
		
		>> In the case that there is inclined side, flat the part by milling work and then proceed the drilling work.
		
Incorrect Application Example		Description
		>> Stacked plate machining is not supported.

Required cutting power

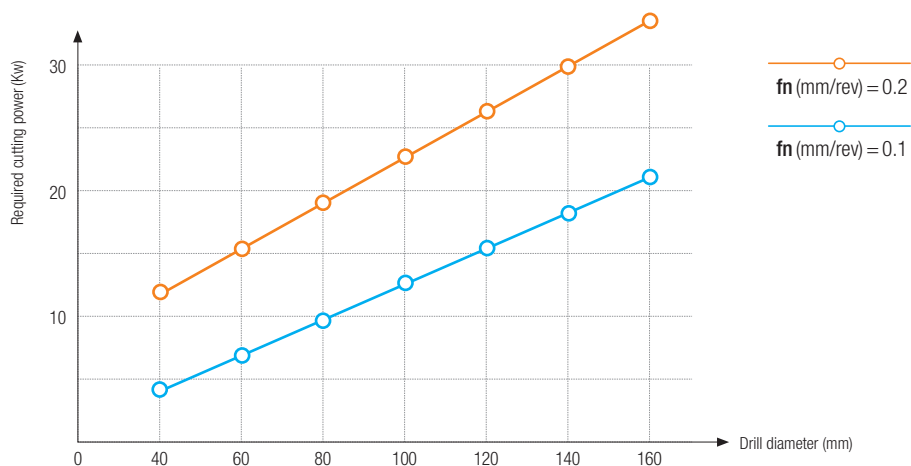


Head Parts Configuration Table

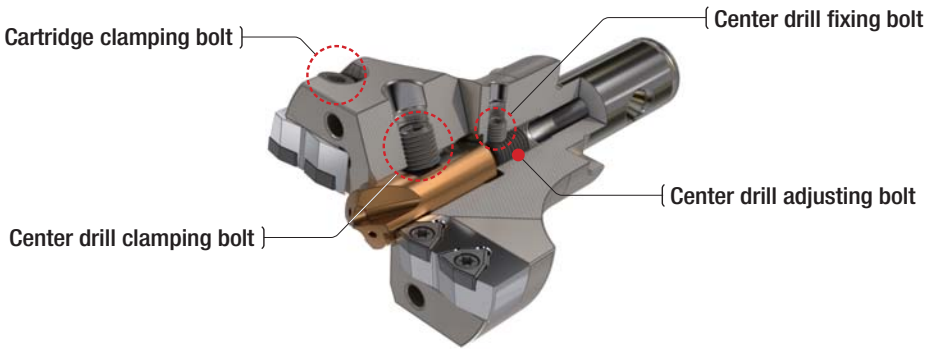

Head designation		Insert			Cartridge		Center drill				
		Designation			Designation		Designation				
WPDCH	45050	WCMT030204-C21N	FTKA02206	TW06S	CWP2-045050C/P	M0410BH-W	CDH1035	M0610SS	M0610SS-H	M0408SS	
	50055				CWP2-050055C/P						
	55060	WCMT040204-C21N	FTNA02555	TW07S	CWP2-055060C/P	M0512BH-W	CDH1238	M0812SS	M0815SS-H	M0508SS	
	60065	WCMT050308-C21N	FTKA0307	TW09S	CWP2-060065C/P						M0815SS
	65070				CWP2-065070C/P						
	70075	CWP2-070075C/P									
	75080	WCMT06T308-C21N	FTKA03508	TW15S	CWP2-075080C/P	M0612HC-W	CDH1645	M1015SS	M1015SS-H	M0610SS	
	80085				CWP2-080085C/P	M0614HC-W					
	85090				CWP2-085090C/P	M0616HC-W		M1020SS	M1018SS-H		
	90095				CWP2-090095C/P						
	95100				CWP2-095100C/P						
	100105	WCMT050308-C21N	FTKA0307	TW09S	CWP3-100105C/P	M0818HC-W	CDH2045	M1220SS	M1220SS-H	M0612SS	
	105110	WCMT06T308-C21N	FTKA03508	TW15S	CWP3-105110C/P						M0820HC-W
	110115				CWP3-110115C/P						
	115120				CWP3-115120C/P	M0825HC-W	CDH2556	M1425SS	M1420SS-H	M0615SS	
	115120				CWP3-120125C/P						
	125130				CWP3-125130C/P						
	130135	CWP3-130135C/P									
	135140	CWP3-135140C/P									
	140150	WCMT080408-C21N	FTKA0411K		CWP3-140150C/P		CDH3068	M1625SS		M0620SS	
	150160				CWP3-150160C/P						
	160170				CWP3-160170C/P						
	170180				CWP3-170180C/P						

Cartridge Parts Configuration Table

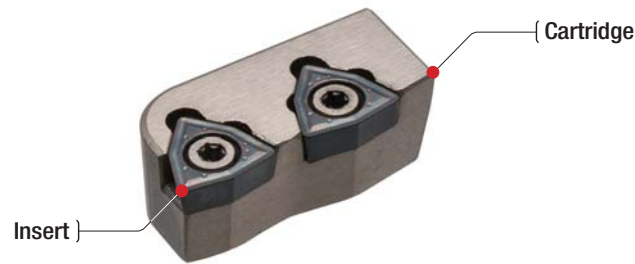

Head diameter (mm)	Cartridge				Insert			Applicable head	
	Central	Peripheral	Clamping bolt 	No. of Insert	Designation	Screw 	Wrench 		
45~50	CWP2-045050C	CWP2-045050P	M0410BH-W	2	WCMT030204-C21N	FTKA02206	TW06S	WPDCH045050	
50~55	CWP2-050055C	CWP2-050055P						WPDCH050055	
55~60	CWP2-055060C	CWP2-055060P	M0512BH-W	2	WCMT040204-C21N	FTNA02555	TW07S	WPDCH055060	
60~65	CWP2-060065C	CWP2-060065P		2	WCMT050308-C21N	FTKA0307	TW09S	WPDCH060065	
65~70	CWP2-065070C	CWP2-065070P						WPDCH065070	
70~75	CWP2-070075C	CWP2-070075P						WPDCH070075	
75~80	CWP2-075080C	CWP2-075080P	M0612HC-W	2	WCMT06T308-C21N	FTKA03508	TW15S	WPDCH075080	
80~85	CWP2-080085C	CWP2-080085P	M0614HC-W					WPDCH080085	
85~90	CWP2-085090C	CWP2-085090P	M0616HC-W					WPDCH085090	
90~95	CWP2-090095C	CWP2-090095P						WPDCH090095	
95~100	CWP2-095100C	CWP2-095100P						WPDCH095100	
100~105	CWP3-100105C	CWP3-100105P	M0818HC-W	3	WCMT050308-C21N	FTKA0307	TW09S	WPDCH100105	
105~110	CWP3-105110C	CWP3-105110P		M0820HC-W	3	WCMT06T308-C21N	FTKA03508	TW15S	WPDCH105110
110~115	CWP3-110115C	CWP3-110115P							WPDCH110115
115~120	CWP3-115120C	CWP3-115120P	WPDCH115120						
120~125	CWP3-120125C	CWP3-120125P	M0825HC-W	WPDCH120125					
125~130	CWP3-125130C	CWP3-125130P		WPDCH125130					
130~135	CWP3-130135C	CWP3-130135P		WPDCH130135					
135~140	CWP3-135140C	CWP3-135140P		WPDCH135140					
140~150	CWP3-140150C	CWP3-140150P		WPDCH140150					
150~160	CWP3-150160C	CWP3-150160P		WPDCH150160					
160~170	CWP3-160170C	CWP3-160170P	3	WCMT080408-C21N	FTKA0411K	WPDCH160170			
170~180	CWP3-170180C	CWP3-170180P				WPDCH170180			

* The cartridge extends the tool life of the body and allows for adjustment of the machining diameter (by 5 mm) through milling the peripheral cartridge surface.




Picture	Designation	Coated	Dimension (mm)					Geomotry
		PC5335	IC	S	RE	AN(°)	CEDC	
	WCMT 030204-C21N	●	5.56	2.38	0.4	7	3	
	040204-C21N	●	6.35	2.38	0.4	7	3	
	040208-C21N	●	6.35	2.38	0.8	7	3	
	050308-C21N	●	7.94	3.18	0.8	7	3	
	06T308-C21N	●	9.525	3.97	0.8	7	3	
	080408-C21N	●	12.7	4.76	0.8	7	3	

* CEDC : Cutting edge count

● : Stock item


CDH (Center drill)

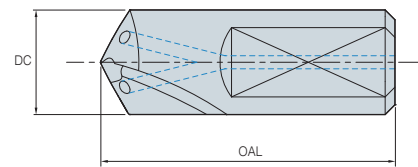

(mm)

Designation		DC	OAL
CDH	1035	10	35
	1238	12	38
	1645	16	45
	2045	20	45
	2556	25	56
	3068	30	68


WPDCD (Drive ring)



(mm)

Designation		DCON-MS	DCON-WS	LF
WPDCD	281310	28	13	10
	321610	32	16	10
	402212	40	22	12
	482712	48	27	12
	583214	58	32	14
	704014	70	40	14
	805016	80	50	16


WPDCH (Drill head)

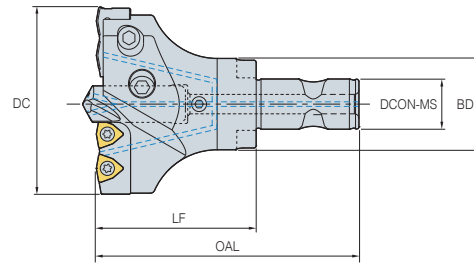

(mm)

Designation		DC	DCON-MS	BD	LF	OAL	Center drill	Cartridge	Insert	Screw 	Wrench 	
WPDCH	45050	45~50	13	28	50	85	CDH1035	CWP2-045050C/P CWP2-050055C/P	WCMT030204-C21N	FTKA02206	TW06S	
	50055	50~55	13	28	50	85		CDH1238	CWP2-055060C/P	WCMT040204-C21N	FTNA02555	TW07S
	55060	55~60	16	32	60	100	CWP2-060065C/P CWP2-065070C/P CWP2-070075C/P		WCMT050308-C21N	FTKA0307	TW09S	
	60065	60~65	16	32	60	100						
	65070	65~70	16	32	60	100	CDH1645		CWP2-075080C/P CWP2-080085C/P CWP2-085090C/P CWP2-090095C/P CWP2-095100C/P	WCMT06T308-C21N	FTKA03508	TW15S
	70075	70~75	22	40	70	115						
	75080	75~80	22	40	70	115						
	80085	80~85	22	40	70	115						
	85090	85~90	27	48	70	120						
	90095	90~95	27	48	70	120		CDH2045				
	95100	95~100	27	48	70	120						
	100105	100~105	32	58	80	130						
	105110	105~110	32	58	80	130						
	110115	110~115	32	58	80	130						
	115120	115~120	40	70	90	145	CDH2556		CWP3-120125C/P CWP3-125130C/P CWP3-130135C/P CWP3-135140C/P CWP3-140150C/P CWP3-150160C/P	WCMT06T308-C21N	FTKA03508	TW15S
	120125	120~125	40	70	90	145						
	125130	125~130	40	70	90	145						
	130135	130~135	40	70	90	145						
	135140	135~140	40	70	90	145						
	140150	140~150	50	80	100	160		CDH3068				
	150160	150~160	50	80	100	160						
	160170	160~170	50	80	100	160						
	170180	170~180	50	80	100	160						


WPDCE(Extension)

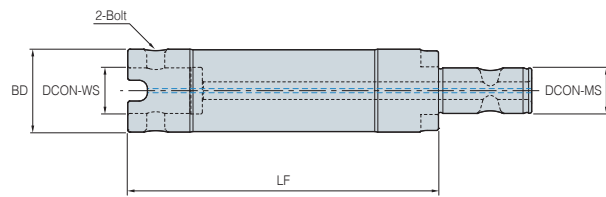

(mm)

Designation	BD	DCON-WS	LF	DCON-MS	Fixing bolt 	Drive ring 
WPDCE	2813115	28	13	115	MTB-08115	WPDCD281310
	2813150	28	13	150		
	2813200	28	13	200		
	2813300	28	13	300		
	3216115	32	16	115		WPDCD321610
	3216200	32	16	200		
	3216300	32	16	300		
	4022113	40	22	113	MTB-10145	WPDCD402212
	4022200	40	22	200		
	4022300	40	22	300		
	4827113	48	27	113	MTB-12175	WPDCD482712
	4827200	48	27	200		
	4827300	48	27	300		
	5832186	58	32	186		WPDCD583214
	5832300	58	32	300		
	7040186	70	40	186	MTB-16260	WPDCD704014
	7040300	70	40	300		
	7040500	70	40	500		
	8050204	80	50	204		WPDCD805016
	8050300	80	50	300		
	8050500	80	50	500		


WPDCR (Reducer)

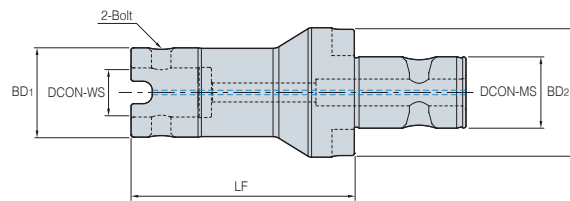

(mm)

Designation		DCON-MS	DCON-WS	LF	BD ₂	BD ₁	Fixing bolt 	Drive ring	
								DCON-WS	DCON-MS
WPDCR	1613100	16	13	100	32	28	MTB-08115	WPDCD281310	WPDCD321610
	2216100	22	16	100	40	32		WPDCD321610	WPDCD402212
	2722100	27	22	100	48	40	MTB-10145	WPDCD402212	WPDCD482712
	3213100	32	13	100	58	28	MTB-08115	WPDCD281310	WPDCD583214
	3216100	32	16	100	58	32		WPDCD321610	WPDCD583214
	3222100	32	22	100	58	40	MTB-10145	WPDCD402212	WPDCD583214
	3227100	32	27	100	58	48	MTB-12175	WPDCD482712	WPDCD583214
	4032100	40	32	100	70	58	MTB-12195	WPDCD583214	WPDCD704014
	5013080	50	13	80	80	28	MTB-08115	WPDCD281310	WPDCD805016
	5016080	50	16	80	80	32		WPDCD321610	WPDCD805016
	5022080	50	22	80	80	40	MTB-10145	WPDCD402212	WPDCD805016
	5027080	50	27	80	80	48	MTB-12175	WPDCD482712	WPDCD805016
	5032080	50	32	80	80	58	MTB-12195	WPDCD583214	WPDCD805016
	5040150	50	40	150	80	70	MTB-16260	WPDCD704014	WPDCD805016

WPDCA (Cylinder shank adapter)

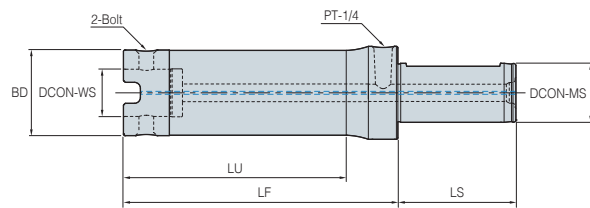

(mm)


Designation		DCON-MS	DCON-WS	LF	LU	BD	LS	Fixing bolt 	Drive ring 
WPDCA	3213115	32	13	115	77	28	70	MTB-08115	WPDCD281310
	3213200	32	13	200	165	28	70		
	3213300	32	13	300	265	28	70		
	4016125	40	16	125	86	32	80		WPDCD321610
	4016200	40	16	200	161	32	80		
	4016300	40	16	300	261	32	80		
	4022148	40	22	148	109	40	80	MTB-10145	WPDCD402212
	4022200	40	22	200	161	40	80		
	4022300	40	22	300	261	40	80		
	4027168	40	27	168	133	48	80	MTB-12175	WPDCD482712
	4027300	40	27	300	265	48	80		
	4032186	40	32	186	151	58	80	MTB-12195	WPDCD583214
	4032300	40	32	300	265	58	80		
WPDCAW	5040186	50	40	186	151	70	80	MTB-16260	WPDCD704014
	5040300	50	40	300	265	70	80		
	5050184	50	50	184	149	80	80		WPDCD805016
	5050300	50	50	300	265	80	80		

⚠ For the safe metalcutting

- Use safety supplies such as protective gloves to prevent possible injury while touching the edge of tools.
- Use safety glasses or safety cover to hedge possible dangers. Inappropriate usage or excessive cutting condition may lead tool's breakage or even the fragment's scattering.
- Clamp the workpiece tightly enough to prevent its movement while its machining.
- Properly manage the tool change phase because the inordinately used tool can be easily broken under the excessive cutting load or severe wear, and it may threat the operator's safety.
- Use safety cover because chips evacuated during cutting are hot and sharp and may cause burns and cuts. To remove chips safely, stop machining, put on protective gloves, and use a hook or other tools.
- Prepare for fire prevention measures as the use of the non-water soluble cutting oil may cause fire.
- Use safety cover and other safety supplies because the spare parts or the tools can be pulled out due to centrifugal force while high speed machining.



Head Office: Holystar B/D, 326, Seocho-daero, Seocho-gu, Seoul, 06633, Republic of Korea
Tel: +82-2-522-3181 Fax: +82-2-522-3184, +82-2-3474-4744 Web: www.korloy.com E-mail: sales.khq@korloy.com

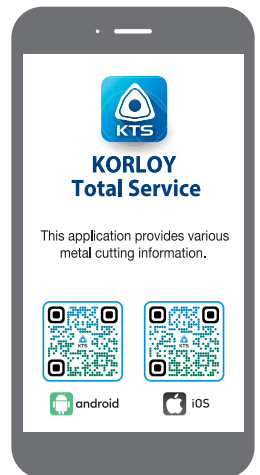

KORLOY AMERICA

620 Maple Avenue, Torrance, CA 90503, USA
Tel : +1-310-782-3800 / +1-888-711-0001 Fax : +1-310-782-3885
E-mail : sales.kai@korloy.com

KORLOY INDIA

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India
Tel : +91-124-4391790 Fax : +91-124-4050032
E-mail : sales.kip@korloy.com

KORLOY TURKIYE

Ziya Gokalp, Mah. Seyit Onbasi Cad. No:36, 3 Kat,
iC Kapi No : 5 Basaksehir/Istanbul, Turkiye
Tel : +90-212-813-8874 E-mail : sales.ktl@korloy.com

KORLOY RUSSIA

115280, Moscow, vn.ter.g. municipal district Danilovsky,
street Masterkova, house 4, premises 1/2
Tel : +7-495-280-1458 Fax : +7-495-280-1459 E-mail : sales.krc@korloy.com

KORLOY UK

13 Approach Rd, Raynes Park, London SW20 8BA, United Kingdom
E-mail : sales.kul@korloy.com

KORLOY EUROPE

Gablonzer Str. 25-27, 61440 Oberursel, Germany
Tel : +49-6171-27783-0 Fax : +49-6171-27783-59
E-mail : sales.keg@korloy.com

KORLOY BRASIL

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri, CEP06460-010, SP, Brasil
Tel : +55-11-4193-3810 Fax : +55-11-4193-5837
E-mail : sales.kbl@korloy.com

KORLOY CHILE

Av. Providencia 1650, Office 1009, 7500027
Providencia-Santiago, Chile
Tel : +56-229-295-490 E-mail : sales.kcs@korloy.com

KORLOY MEXICO

Avenida de las Ciencias, No. 3015, Interior 406, Juriquilla Santa Fe,
C.P.76230 Querétaro, Mexico
Tel : +52-442-193-3600 E-mail : sales.kml@korloy.com

KORLOY FACTORY INDIA

Plot NO. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India
Tel : +91-124-4391790 Fax : +91-124-4050032
E-mail : pro.kim@korloy.com