

Super Endmill for Ti ^{New} **for HRSA**

Endmills series for difficult-to-cut materials (Ti and HRSA)

- Machining HRSA and Ti components like engine, turbine and etc. used in aerospace and power generation industries
- Optimal for difficult-to-cut materials machining due to reduced cutting heat and enhanced chip evacuation



Endmills series for difficult-to-cut materials (Ti and HRSA)

Super Endmill

Using difficult-to-cut materials is getting increased in various industries, aerospace, medical, automobile etc. with demands on high performance and light weight products. According to the change, KORLOY launched Super Endmill for Ti following Super Endmill for HRSA.

With its optimal edge structure for Titanium machining and enlarged chip pocket in flutes design, **Super Endmill for Ti** reduces cutting load and cutting heat and it improves chip evacuation. In addition, applying high toughness substrate and high lubrication coating layer minimizing irregular tool fracture and welding ensure maximized tool life.

Super Endmill for HRSA increases cutting performance and cutting stability applying positive rake angle and irregular flute spacing. Also, the new coating layer with high hardness controls fracture in cutting edge and ensures long tool life for HRSA machining by its increased wear resistance.

Super Endmill for Ti provides the best solution in Titanium alloy and stainless steel cutting, and Super Endmill for HRSA gives the same for HRSA such as Inconel, Hastelloy and Waspaloy.

» **Titanium and stainless steel cutting**

- Super Endmill for Ti

» **Ni based HRSA cutting**


- Super Endmill for HRSA

» **Improved chip evacuation and long tool life**


- Large chip pocket and streamlined flute design
- Sharp cutting edge optimal for difficult-to-cut materials cutting
- High lubrication coating layer and high toughness substrate



Code system

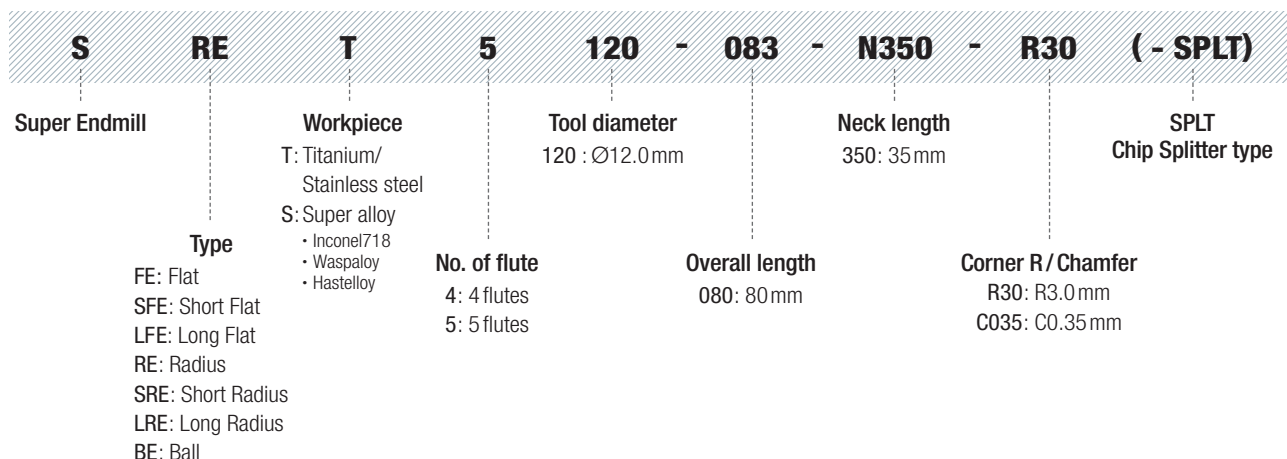

Tool selection guide

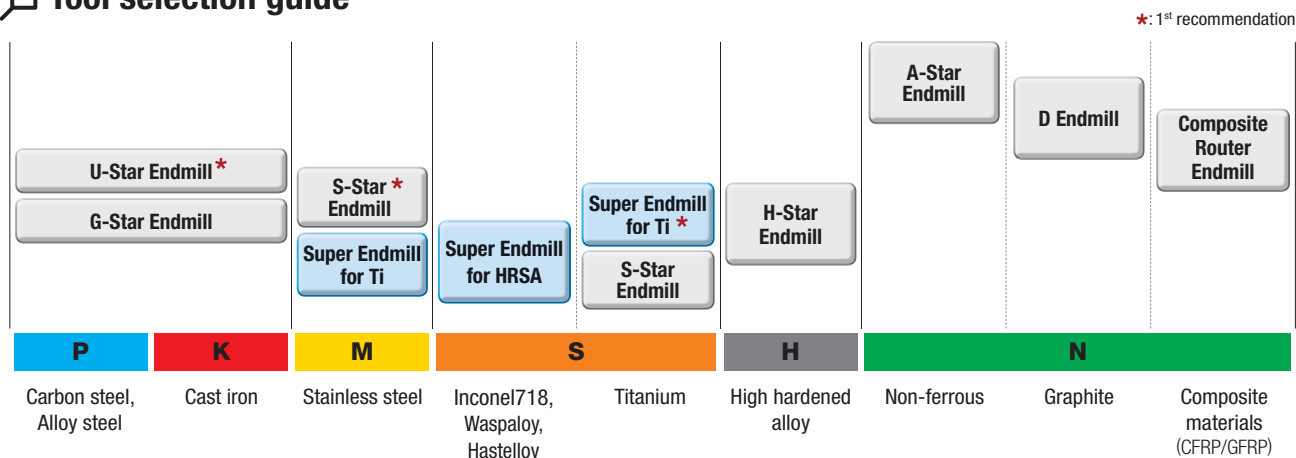

Line-up

Workpiece	Type	Designation	Grade	Picture	Product name	No. of flute	Size		page
							Min	Max	
Super Endmill for Ti	Flat	SFET4000	UL1		4 flutes flat Endmill	4	3	20	12
		SSFET5000 <small>New</small>	UT2		5 flutes short neck flat Endmill	5	6	20	14
		SFET5000 <small>New</small>	UT2		5 flutes neck flat Endmill	5	6	20	15
		SLFET5000 <small>New</small>	UT1		5 flutes long flat Endmill	5	6	20	18
		SLFET5000-SPLT <small>New</small>	UT1		5 flutes long Splitter flat Endmill	5	6	20	20
	Radius	SRET4000	UL1		4 flutes radius Endmill	4	6	20	13
		SSRET5000 <small>New</small>	UT2		5 flutes short neck radius Endmill	5	6	20	16
		SRET5000 <small>New</small>	UT2		5 flutes neck radius Endmill	5	6	20	17
		SLRET5000 <small>New</small>	UT1		5 flutes long radius Endmill	5	6	20	19
	Ball	SBET2000	UL1		2 flutes ball Endmill	2	4	12	21
SBET4000		UL1		4 flutes ball Endmill	4	4	12	22	
Super Endmill for HRSA	Flat	SFES4000	SL1		4 flutes flat Endmill	4	3	20	26
	Radius	SRES4000	SL1		4 flutes radius Endmill	4	3	20	27

Super Endmill for Ti

Features

- Endmill for titanium and stainless steel cutting
- Longer tool life - high toughness substrate and high lubrication coating layer

SFET4000 (Flat) / SRET4000 (Radius)

$A^\circ \neq B^\circ$
 $C^\circ \neq D^\circ$

- **Irregular flute spacing shape**
- Reduced chattering and vibration
- **Large chip pocket and streamlined flute design**
- Good chip evacuation

SBET4000 (Ball)

$A^\circ \neq B^\circ$
 $C^\circ \neq D^\circ$

- **S-curve cutting edge**
- Reduced cutting load

SFET5000 (Flat) / SRET5000 (Radius) New!

$A^\circ \neq B^\circ \neq C^\circ \neq D^\circ \neq E^\circ$

- **Applying tapered core web shape**
- Control high stiffness, transforming tools

SLFET5000-SPLT (Flat) New!

$A^\circ \neq B^\circ \neq C^\circ \neq D^\circ \neq E^\circ$



- **Applying variable pitch shape**
- Controlling chattering and vibration
- **U shape chip breaker**
- Lower chip cutting and cutting load
- **Applying tapered core web shape**
- Control high stiffness and transforming tools

Reduced chattering and low machinability cutting load

Workpiece Titanium alloy (Ti-6Al-4V)
Cutting conditions vc (m/min) = 50, fz (mm/t) = 0.045
 ap (mm) = 18, ae (mm) = 6, wet (emulsion)
Tool SFET5120-083 (Diameter = \varnothing 12 mm, UT coating)


High quality surface finish

Workpiece Titanium alloy (Ti-6Al-4V)
Cutting conditions vc (m/min) = 80, fz (mm/t) = 0.075
 ap (mm) = 42, ae (mm) = 0.9, wet (emulsion)
Tool SLFET5120-105-SPLT (Diameter = \varnothing 12 mm, UT coating)

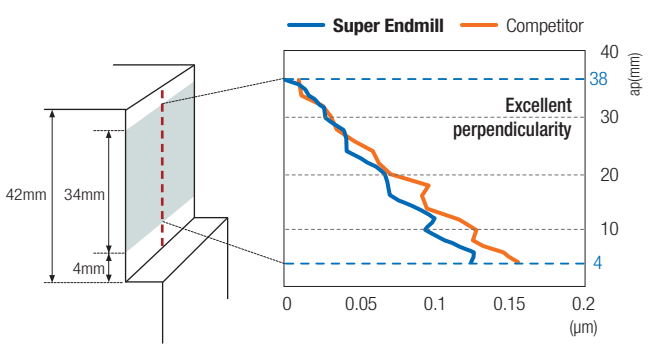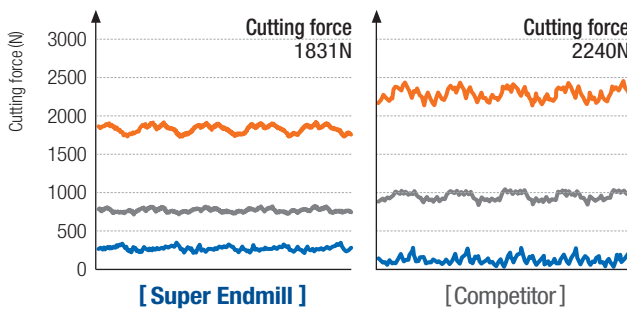


Grade features

UL coating (Ultra Lubricating coating)



- Enhanced chip control and welding resistance by exclusive lubrication coating technology
- High chipping resistance substrate

UT coating (Ultra Thermal resistance coating) ^{New}



- Applied an excellent technology with stable machinability at high temperature increases wear resistance, heat resistance and chipping resistance
- Applied substrate with high chipping resistance

[UL, UT coating application range]

◎ : Excellent ○ : Good


Workpiece	P					K	M	S		H	N
	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous
	Below HB225	HB225 ~325	HRC30 ~40	HRC40 ~45	HRC45 ~55	-	-	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HRC55 ~70	Copper, AL Graphite, Acryl, CFRP
UL coating	○	○	○	○		○	◎		○		
UT coating ^{New}		○	○	○		○	○		◎		

Performance evaluation

Titanium alloy (Ti-6AL-4V)

Cutting conditions vc (m/min) = 80, fz (mm/t) = 0.07, ap (mm) = 12, ae (mm) = 2.4, wet (emulsion)

Tool SFET4120-080 (Diameter = \varnothing 12 mm, UL coating)

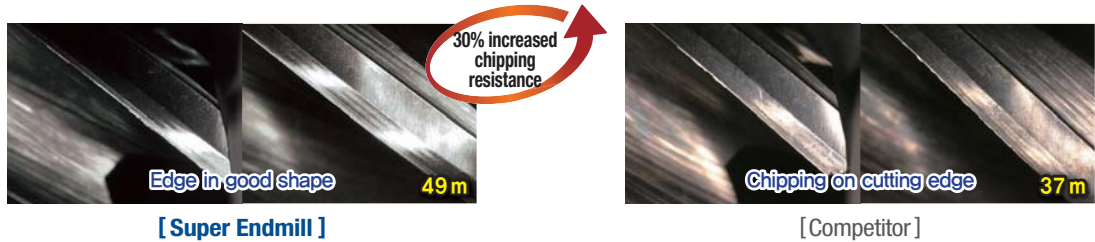

» High quality performance from high toughness substrate and cutting stability

Titanium alloy (Ti-6AL-4V)

Cutting conditions vc (m/min) = 50, fz (mm/t) = 0.045, ap (mm) = 18, ae (mm) = 6, wet (emulsion)

Tool SFET5120-083-N350-C035 (Diameter = \varnothing 12 mm, UT coating)



» High quality due to high toughness substrate and improved high-temperature machining stability

Titanium alloy (Ti-6AL-4V)






Cutting conditions vc (m/min) = 160, fz (mm/t) = 0.14, ap (mm) = 1.2, ae (mm) = 1.2, wet (emulsion)

Tool SBET4120-100 (Diameter = \varnothing 12 mm, UL coating)









» High quality performance from high toughness substrate and cutting stability






 Recommended cutting conditions_ SFET4000 (Flat) / SRET4000 (Radius)

Workpiece				Brinell hardness (HB)	Specific cutting force (N/mm ²)	ap (mm)	ae (mm)	Machining	Diameter (mm)											
ISO	Workpiece materials	ISO (DIN)	AISI							Cutting length (mm)	3	4	5	6	8	10	12	16	20	
										8	10	15	15	20	25	30	42	48		
P	Carbon steel	(C22) C40 C45	1020 1039 1045	230	400 ~ 600	1.5D	0.1D		vc	100	108	114	114	114	114	114	114	114	114	
										fz	0.020	0.030	0.040	0.050	0.065	0.070	0.080	0.085	0.100	
										rpm	10610	8594	7257	6048	4536	3629	3024	2268	1814	
										feed	849	1031	1161	1210	1179	1016	968	771	726	
										vc	64	65	68	70	70	70	70	70	70	
										fz	0.016	0.022	0.030	0.038	0.046	0.050	0.056	0.060	0.070	
	rpm	6791	5173	4329	3714	2785	2228	1857	1393	1114										
	feed	435	455	519	564	512	446	416	334	312										
	Alloy steel	20NiCrMo2 - - 42CrMo4	8615 4320 4130 4140	280	800 ~ 1000	1.5D	0.1D		vc	141	138	151	151	151	151	151	151	151	151	151
										fz	0.021	0.032	0.049	0.069	0.067	0.075	0.078	0.095	0.090	
										rpm	15000	11000	9600	8000	6000	4800	4000	3000	2400	
										feed	1250	1400	1900	2200	1600	1440	1250	1140	860	
vc										65	70	71	70	70	69	72	70	69		
fz										0.015	0.022	0.035	0.050	0.060	0.060	0.070	0.070	0.080		
rpm	6900	5600	4500	3700	2800	2200	1900	1400	1100											
feed	410	490	630	740	670	530	530	390	350											
M	Ferritic/ martensitic series	X6CrAl13 X6Cr17 X12CrS13 X6CrMo17-1 (X6Cr13) X12Cr13	405 430 416 434 403 410	240	450 540 450	1.5D	0.1D		vc	100	108	114	114	114	114	114	114	114	114	
										fz	0.020	0.030	0.040	0.050	0.065	0.070	0.080	0.085	0.100	
										rpm	10610	8594	7257	6048	4536	3629	3024	2268	1814	
										feed	849	1031	1161	1210	1179	1016	968	771	726	
										vc	64	65	68	70	70	70	70	70	70	
										fz	0.016	0.022	0.030	0.038	0.046	0.050	0.056	0.060	0.070	
	rpm	6791	5173	4329	3714	2785	2228	1857	1393	1114										
	feed	435	455	519	564	512	446	416	334	312										
	Austenite series	X10CrNiS18-9 X5CrNi18-9 X5CrNiMo17-12-2	303 304 316	200	520	1.5D	0.1D		vc	72	76	78	80	80	80	80	80	80	80	80
										fz	0.020	0.030	0.040	0.050	0.065	0.070	0.080	0.085	0.100	
										rpm	7639	6048	4966	4244	3183	2546	2122	1592	1273	
										feed	611	726	795	849	828	713	679	541	509	
vc										45	46	48	50	50	50	50	50	50		
fz										0.016	0.022	0.030	0.038	0.046	0.050	0.056	0.060	0.070		
rpm	4775	3660	3056	2653	1990	1592	1326	955	796											
feed	306	322	367	403	366	318	297	229	223											
S	Ti/ Ti Alloy	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	320	600 ~ 1800	1.5D	0.1D		vc	70	74	75	76	78	78	78	78	78	78	
										fz	0.018	0.027	0.035	0.043	0.054	0.064	0.073	0.080	0.092	
										rpm	7427	5889	4775	4032	3104	2483	2069	1552	1241	
										feed	535	636	668	693	670	636	604	497	457	
										vc	40	41	43	45	45	45	45	45	45	
										fz	0.014	0.020	0.027	0.034	0.040	0.045	0.050	0.054	0.063	
rpm	4244	3263	2737	2387	1790	1432	1194	895	716											
feed	238	261	296	327	286	258	239	193	180											

✓ Recommended cutting conditions **SSFET5000** (Short neck flat) / **SFET5000** (Neck flat)  **SSRET5000** (Short radius flat) / **SRET5000** (Neck radius)

ISO	Workpiece			Brinell hard- ness (HB)	Specific cutting force (N/mm ²)	ap (mm)	ae (mm)	Machining 	Diameter (mm)	6	8	10	12	16	20
	Workpiece materials	KS	ISO (DIN)						Cutting length (mm)	6	8	10	12	16	20
										13	19	22	26	36	44
P	Carbon steel	SM20C SM40C SM45C	(C22) C40 C45	~200	400 ~ 600	1.5D	0.5D	Shouldering 	vc	152	152	152	152	152	152
									fz	0.038	0.046	0.059	0.074	0.095	0.115
									rpm	8064	6048	4838	4032	3024	2419
									feed	1532	1391	1427	1492	1436	1391
	Alloy steel	SNCM220 SNCM420 SCM430 SCM440	20NiCrMo2 - - 42CrMo4	~300	800 ~ 1000	1.5D	0.5D	Shouldering 	vc	122	122	122	122	122	122
									fz	0.029	0.036	0.045	0.058	0.072	0.088
									rpm	6472	4854	3883	3236	2427	1942
									feed	938	874	874	938	874	854
M	Ferritic/ martensitic series	STS405 STS430 STS416 STS434 STS403 STS410	X6CrAl13 X6Cr17 X12CrS13 X6CrMo17-1 (X6Cr13) X12Cr13	240	450 540 450	1.5D	0.5D	Shouldering 	vc	76	76	76	76	76	76
									fz	0.024	0.031	0.04	0.05	0.061	0.075
									rpm	4032	3024	2419	2016	1512	1210
									feed	484	469	484	504	461	454
	Austenite series	STS303 STS304 STS316	X10CrNiS18-9 X5CrNi18-9 X5CrNiMo17-12-2	200	250	1.5D	0.5D	Shouldering 	vc	91	91	91	91	91	91
									fz	0.031	0.036	0.048	0.062	0.072	0.083
									rpm	4828	3621	2897	2414	1810	1448
									feed	748	652	695	748	652	601
S	Ti/ Ti Alloy	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	320	680 ~ 1800	1.5D	0.5D	Shouldering 	vc	49	49	49	49	49	49
									fz	0.024	0.031	0.037	0.046	0.054	0.061
									rpm	2600	1950	1560	1300	975	780
									feed	312	302	289	299	263	238

 Recommended cutting conditions **SFET5000** (Long flat) / **SRET5000** (Long radius)  **SLFET5000-SPLT** (Chip Splitter Flat)

ISO	Workpiece			Brinell hard- ness (HB)	Specific cutting force (N/mm ²)	ap (mm)	ae (mm)	Machining	Diameter (mm)	6	8	10	12	16	20	
	Workpiece materials	KS	ISO (DIN)						Cutting length (mm)	24	32	40	48	64	80	
										vc	fz	rpm	feed	vc	fz	rpm
P	Carbon steel	SM20C SM40C SM45C	(C22) C40 C45	~200	400 ~ 600	3D	0.075D	Shouldering 	vc	160	160	160	160	160	160	160
									fz	0.043	0.062	0.08	0.096	0.11	0.13	
									rpm	8493	6369	5096	4246	3185	2548	
									feed	1826	1975	2038	2038	1752	1656	
	Alloy steel	SNM220 SNM420 SCM430 SCM440	20NiCrMo2 - - 42CrMo4	~300	800 ~ 1000	3D	0.075D	Shouldering 	vc	140	140	140	140	140	140	140
									fz	0.04	0.057	0.072	0.086	0.1	0.12	
									rpm	7431	5573	4459	3715	2787	2229	
									feed	1486	1588	1605	1598	1393	1338	
M	Ferritic/ martensitic series	STS405 STS430 STS416 STS434 STS403 STS410	X6CrAl13 X6Cr17 X12CrS13 X6CrMo17-1 (X6Cr13) X12Cr13	240	450 540 450	3D	0.075D	Shouldering 	vc	150	150	150	150	150	150	150
									fz	0.04	0.057	0.072	0.086	0.1	0.12	
									rpm	7962	5971	4777	3981	2986	2389	
									feed	1592	1702	1720	1712	1493	1433	
	Austenite series	STS303 STS304 STS316	X10CrNiS18-9 X5CrNi18-9 X5CrNiMo17-12-2	200	250	3D	0.075D	Shouldering 	vc	120	120	120	120	120	120	120
									fz	0.03	0.04	0.05	0.06	0.075	0.081	
									rpm	6369	4777	3822	3185	2389	1911	
									feed	955	955	955	955	896	776	
S	Ti/ Ti Alloy	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	320	680 ~ 1800	3D	0.075D	Shouldering 	vc	80	80	80	80	80	80	80
									fz	0.036	0.052	0.066	0.08	0.094	0.11	
									rpm	4777	3583	2866	2389	1791	1433	
									feed	860	932	946	955	842	788	

✓ Recommended cutting conditions _ SBET2000 (Ball)

Workpiece				Brinell hardness (HB)	Specific cutting force (N/mm ²)	ap (mm)	ae (mm)	Machining	Diameter (mm)	1	2	3	4	5	6	8	10	12	
ISO	Workpiece materials	ISO (DIN)	AISI							Cutting length (mm)	1	2	3	8	12	12	16	20	25
P	Carbon steel	(C22) C40 C45	1020 1039 1045	230	400 ~ 600	≤ 0.1D	≤ 0.1D	Copying	vc	130	130	123	200	200	200	200	200	200	200
									fz	0.039	0.056	0.080	0.044	0.051	0.050	0.059	0.070	0.085	
								rpm	41600	20800	13000	16000	12700	10600	8000	6400	5300		
	Alloy steel	20NiCrMo2 - 42CrMo4	8615 4320 4130 4140	280	800 ~ 1000	≤ 0.1D	≤ 0.1D	Copying	feed	1625	1170	1040	1400	1300	1050	950	900	900	
M	Ferritic/martensitic series	X6CrAl13 X6Cr17 X12CrS13 X6CrMo17-1 (X6Cr13) X12Cr13	405 430 416 434 403 410	240	450 540 450	≤ 0.1D	≤ 0.1D	Copying	vc	120	120	113	180	180	180	180	180	180	180
									fz	0.039	0.056	0.080	0.035	0.039	0.044	0.058	0.068	0.081	
									rpm	38400	19200	12000	14400	11520	9600	7200	5760	4800	
									feed	3000	2160	1920	1008	897	845	835	783	778	
	Austenite series	X10CrNiS18-9 X5CrNi18-9 X5CrNiMo17-12-2	303 304 316	200	520	≤ 0.1D	≤ 0.1D	Copying	vc	100	100	94	150	150	150	150	150	150	150
fz									0.039	0.056	0.080	0.035	0.039	0.044	0.058	0.068	0.081		
rpm									32000	16000	10000	12000	9600	8000	6000	4800	4000		
feed									2500	1800	1600	850	750	700	700	650	650		
S	Ti/ Ti Alloy	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	320	600 ~ 1800	≤ 0.1D	≤ 0.1D	Copying	vc	100	100	94	150	150	150	150	150	150	150
									fz	0.039	0.056	0.080	0.035	0.039	0.044	0.058	0.068	0.081	
									rpm	32000	16000	10000	12000	9600	8000	6000	4800	4000	
									feed	2500	1800	1600	850	750	700	700	650	650	


✓ Recommended cutting conditions _ SBET4000 (Ball)

Workpiece				Brinell hardness (HB)	Specific cutting force (N/mm ²)	ap (mm)	ae (mm)	Machining	Diameter (mm)	4	5	6	8	10	12
ISO	Workpiece materials	ISO (DIN)	AISI							Cutting length (mm)	8	12	12	16	20
P	Carbon steel	(C22) C40 C45	1020 1039 1045	230	400 ~ 600	≤ 0.1D	≤ 0.1D	Copying	vc	200	200	200	200	200	200
									fz	0.044	0.051	0.050	0.059	0.070	0.085
								rpm	16000	12700	10600	8000	6400	5300	
	Alloy steel	20NiCrMo2 - 42CrMo4	8615 4320 4130 4140	280	800 ~ 1000	≤ 0.1D	≤ 0.1D	Copying	feed	2800	2600	2100	1900	1800	1800
M	Ferritic/martensitic series	X6CrAl13 X6Cr17 X12CrS13 X6CrMo17-1 (X6Cr13) X12Cr13	405 430 416 434 403 410	240	450 540 450	≤ 0.1D	≤ 0.1D	Copying	vc	180	180	180	180	180	180
									fz	0.035	0.039	0.044	0.058	0.068	0.081
									rpm	14400	11520	9600	7200	5760	4800
									feed	2040	1800	1680	1680	1560	1560
	Austenite series	X10CrNiS18-9 X5CrNi18-9 X5CrNiMo17-12-2	303 304 316	200	520	≤ 0.1D	≤ 0.1D	Copying	vc	150	150	150	150	150	150
fz									0.035	0.039	0.044	0.058	0.068	0.081	
rpm									12000	9600	8000	6000	4800	4000	
feed									1700	1500	1400	1400	1300	1300	
S	Ti/ Ti Alloy	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	Ti6Al4V Ti5Al5V5Mo Ti7Al4Mo	320	600 ~ 1800	≤ 0.1D	≤ 0.1D	Copying	vc	150	150	150	150	150	150
									fz	0.035	0.039	0.044	0.058	0.068	0.081
									rpm	12000	9600	8000	6000	4800	4000
									feed	1700	1500	1400	1400	1300	1300

Product using guide

Cutting condition by overhang


- For shank taper type, adjust conditions based on clamping at the neck
 - When the overhang is increased by 1D from clamped neck part, decrease R.P.M and feed by 10%.
- For straight type, adjust conditions based on overhang length
 - Ex: When the overhang is increased by 1D from 3D, decrease R.P.M and feed by 10%.

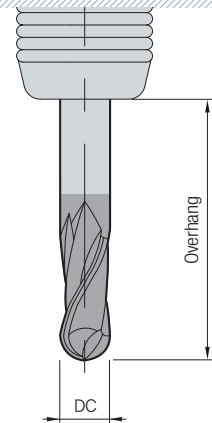

Cutting speed formulas (Ball Endmills)


- Effective cutting speed V_{eff}
 $= (\pi \times Deff \times n) / 1000$ ($n = \text{min}^{-1}$)
- Effective diameter $Deff$ calculation formula $Deff$
 $= (2 \sqrt{ap(D-ap)} \times \alpha)$
 $D = \text{Ø}$ (Tool diameter), $Deff = \text{Efficient diameter}$
- Effective cutting speed formulas : When slope θ is 0°
 $V_{eff} = (\pi \times Deff \times n) / 1000$
 $Deff = \text{Efficient diameter}$ Calculate $Deff$ as ap with various Ball Endmills

α	$\alpha = 1$	(Slope angle $\theta = 0^\circ$)
	$\alpha = 1.2$	(Slope angle $\theta = 7^\circ$)
	$\alpha = 1.5$	(Slope angle $\theta = 15^\circ$)
	$\alpha = 1.7$	(Slope angle $\theta = 30^\circ$)
	$\alpha = 2.17$	(Slope angle $\theta = 45^\circ$)
	$\alpha = 2.3$	(Slope angle $\theta = 60^\circ$)

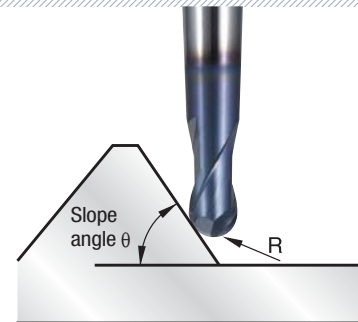

Ex) Diameter: 6 mm, $ap = 0.3$ mm, $Deff = 2.6$ mm, $N = 14,000$ (min^{-1})
 Slope angle 0° : $V_{eff} = 113.7$ (m/min)
 Slope angle 15° : $V_{eff} = 113.7 \times 1.5 = 170.6$ (m/min)

Cutting speed formulas (Ball Endmills, slope angle = 0°)

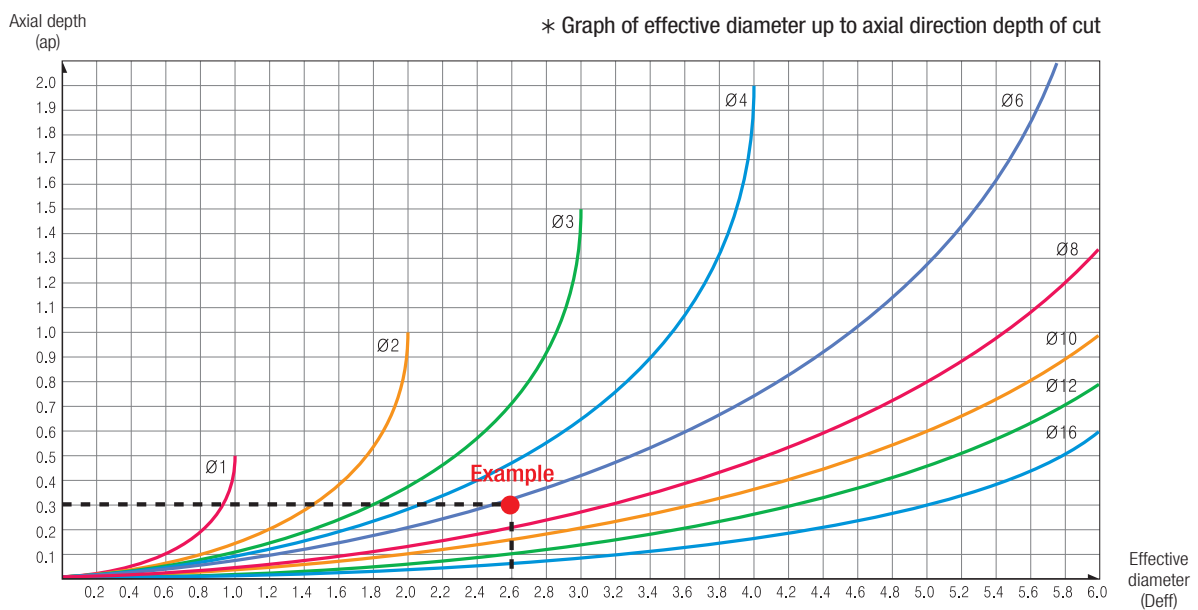

(Graph of effective diameter and axial direction depth of cut of Ball Endmill with high rake angle from 0° to Ø1 ~ Ø16)

SFET4000 (Flat)




H-A
35°/38°

h6
shank

UL
coating

DC	Tolerance
Ø1 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

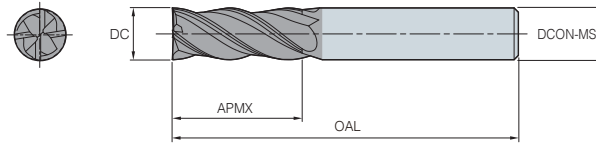

(mm)

Designation	DC	APMX	OAL	DCON-MS
SFET				
4030-050	3	8	50	6
4040-050	4	10	50	6
4050-060	5	15	60	6
4060-060	6	15	60	6
4080-070	8	20	70	8
4100-075	10	25	75	10
4120-080	12	30	80	12
4160-100	16	42	100	16
4200-100	20	48	100	20

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
	○	○	○	○		○	◎		○		

SRET4000(Radius)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

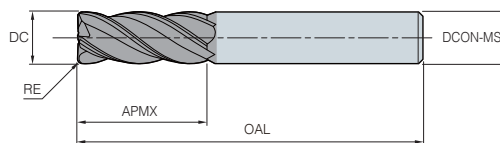

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRET 4030-050-R02	3	8	50	6	0.2
4030-050-R05	3	8	50	6	0.5
4040-050-R02	4	10	50	6	0.2
4040-050-R05	4	10	50	6	0.5
4050-060-R02	5	15	60	6	0.2
4050-060-R05	5	15	60	6	0.5
4050-060-R10	5	15	60	6	1
4060-060-R03	6	15	60	6	0.3
4060-060-R05	6	15	60	6	0.5
4060-060-R10	6	15	60	6	1
4080-070-R03	8	20	70	8	0.3
4080-070-R05	8	20	70	8	0.5
4080-070-R10	8	20	70	8	1
4100-075-R03	10	25	75	10	0.3
4100-075-R05	10	25	75	10	0.5
4100-075-R10	10	25	75	10	1
4100-075-R15	10	25	75	10	1.5
4100-075-R20	10	25	75	10	2
4120-080-R05	12	30	80	12	0.5
4120-080-R10	12	30	80	12	1
4120-080-R15	12	30	80	12	1.5
4120-080-R20	12	30	80	12	2
4120-080-R25	12	30	80	12	2.5
4120-080-R30	12	30	80	12	3
4160-100-R05	16	42	100	16	0.5
4160-100-R10	16	42	100	16	1
4200-100-R05	20	48	100	20	0.5
4200-100-R10	20	48	100	20	1

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
	○	○	○	○		○	◎		○		

SSFET5000 (Short neck flat) New



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

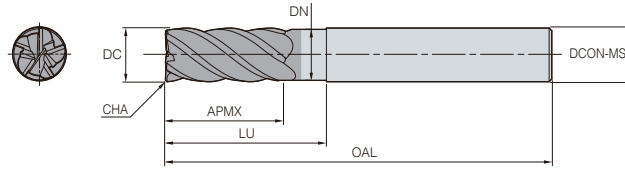

(mm)

Designation		DC	APMX	LU	DN	OAL	DCON-MS	CHA
SSFET	5060-054-N170-C020	6	10	17	5.7	54	6	0.2
	5080-058-N210-C020	8	12	21	7.6	58	8	0.2
	5100-066-N240-C030	10	14	24	9.5	66	10	0.3
	5120-073-N260-C035	12	16	26	11.4	73	12	0.35
	5160-082-N320-C040	16	22	32	15.2	82	16	0.4
	5200-092-N400-C050	20	26	40	19	92	20	0.5

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SFET5000 (Neck flat) New



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

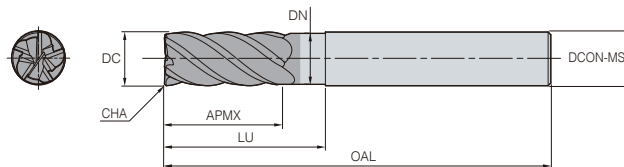

(mm)

Designation		DC	APMX	LU	DN	OAL	DCON-MS	CHA
SFET 	5060-057-N200-C020	6	13	20	5.7	57	6	0.2
	5080-063-N250-C020	8	19	25	7.6	63	8	0.2
	5100-072-N300-C030	10	22	30	9.5	72	10	0.3
	5120-083-N350-C035	12	26	35	11.4	83	12	0.35
	5160-092-N430-C040	16	36	43	15.2	92	16	0.4
	5200-104-N560-C050	20	44	56	19	104	20	0.5

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SSRET5000 (Short neck radius) New!



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

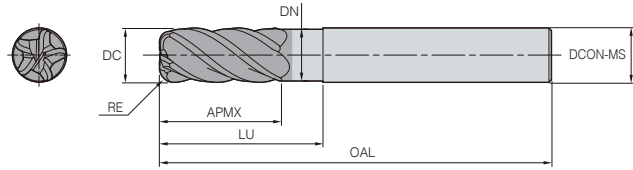

(mm)

Designation		DC	APMX	LU	DN	OAL	DCON-MS	RE
SSRET 	5060-054-N170-R05	6	10	17	5.7	54	6	0.5
	5080-058-N210-R05	8	12	21	7.6	58	8	0.5
	5100-066-N240-R05	10	14	24	9.5	66	10	0.5
	5120-073-N260-R05	12	16	26	11.4	73	12	0.5
	5160-082-N320-R10	16	22	32	15.2	82	16	1
	5200-092-N400-R10	20	26	40	19	92	20	1

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspalloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SRET5000 (Neck radius) New



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

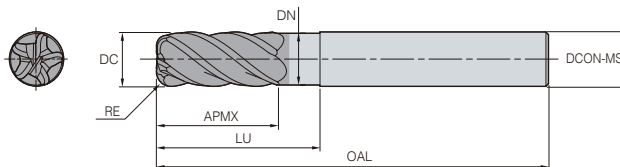

(mm)

Designation		DC	APMX	LU	DN	OAL	DCON-MS	RE
SRET 	5060-057-N200-R05	6	13	20	5.7	57	6	0.5
	5060-057-N200-R10	6	13	20	5.7	57	6	1
	5080-063-N250-R05	8	19	25	7.6	63	8	0.5
	5080-063-N250-R10	8	19	25	7.6	63	8	1
	5100-072-N300-R05	10	22	30	9.5	72	10	0.5
	5100-072-N300-R10	10	22	30	9.5	72	10	1
	5100-072-N300-R20	10	22	30	9.5	72	10	2
	5120-083-N350-R10	12	26	35	11.4	83	12	1
	5120-083-N350-R20	12	26	35	11.4	83	12	2
	5120-083-N350-R30	12	26	35	11.4	83	12	3
	5160-092-N430-R10	16	36	43	15.2	92	16	1
	5160-092-N430-R20	16	36	43	15.2	92	16	2
	5160-092-N430-R30	16	36	43	15.2	92	16	3
	5200-104-N560-R10	20	44	56	19	104	20	1
	5200-104-N560-R20	20	44	56	19	104	20	2
5200-104-N560-R30	20	44	56	19	104	20	3	

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SLFET5000 (Long flat) New!



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

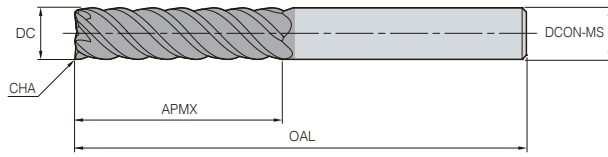

(mm)

Designation		DC	APMX	OAL	DCON-MS	CHA
SLFET 	5060-070	6	24	70	6	0.12
	5080-080	8	32	80	8	0.12
	5100-090	10	40	90	10	0.12
	5120-105	12	48	105	12	0.15
	5160-130	16	64	130	16	0.2
	5200-150	20	80	150	20	0.25

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspalloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SLRET5000 (Long radius) New!



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

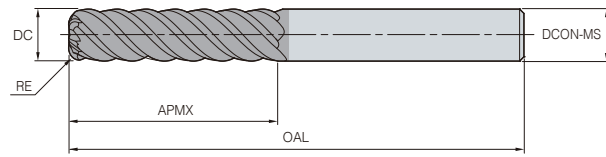

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE	
SLRET	5060-070-R05	6	24	70	6	0.5
	5060-070-R10	6	24	70	6	1
	5080-080-R05	8	32	80	8	0.5
	5080-080-R10	8	32	80	8	1
	5100-090-R05	10	40	90	10	0.5
	5100-090-R10	10	40	90	10	1
	5100-090-R20	10	40	90	10	2
	5120-105-R10	12	48	105	12	1
	5120-105-R20	12	48	105	12	2
	5120-105-R30	12	48	105	12	3
	5160-130-R10	16	64	130	16	1
	5160-130-R20	16	64	130	16	2
	5160-130-R30	16	64	130	16	3
	5200-150-R10	20	80	150	20	1
	5200-150-R20	20	80	150	20	2
	5200-150-R30	20	80	150	20	3

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SLFET5000-SPLT (Chip splitter flat) New



DC	Tolerance
Ø6	0.000 ~ -0.020
Ø8 ~ Ø20	0.000 ~ -0.030

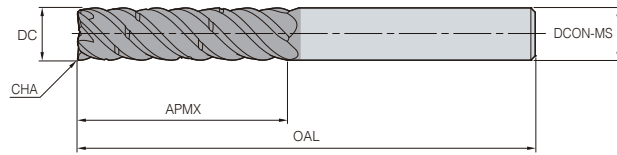

(mm)

Designation		DC	APMX	OAL	DCON-MS	CHA
SLFET 	5060-060-SPLT	6	18	60	6	0.12
	5060-070-SPLT	6	24	70	6	0.12
	5080-070-SPLT	8	24	70	8	0.12
	5080-080-SPLT	8	32	80	8	0.12
	5100-075-SPLT	10	30	75	10	0.12
	5100-090-SPLT	10	40	90	10	0.12
	5120-080-SPLT	12	36	80	12	0.15
	5120-105-SPLT	12	48	105	12	0.15
	5160-100-SPLT	16	48	100	16	0.2
	5160-130-SPLT	16	64	130	16	0.2
	5200-110-SPLT	20	60	110	20	0.25
	5200-150-SPLT	20	80	150	20	0.25

• Applicable workpiece range



◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
		○	○	○		○	○		◎		

SBET2000 (Ball)



DC	Tolerance
Ø1 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø12	0.000 ~ -0.020

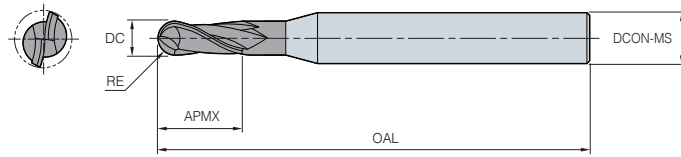

(mm)

Designation		DC	APMX	OAL	DCON-MS	RE
SBET 2	2010-050	1	1	50	6	0.5
	2020-050	2	2	50	6	1.0
	2030-050	3	3	50	6	1.5
	2040-050	4	8	50	6	2.0
	2040-070	4	8	70	6	2.0
	2050-060	5	12	60	6	2.5
	2050-080	5	12	80	6	2.5
	2060-060	6	12	60	6	3.0
	2060-090	6	12	90	6	3.0
	2080-070	8	16	70	8	4.0
	2080-100	8	16	100	8	4.0
	2100-075	10	20	75	10	5.0
	2100-100	10	20	100	10	5.0
	2120-080	12	25	80	12	6.0
	2120-100	12	25	100	12	6.0

• Applicable workpiece range



◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
	○	○	○	○		○	◎		○		

SBET4000 (Ball)



DC	Tolerance
Ø4 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø12	0.000 ~ -0.020

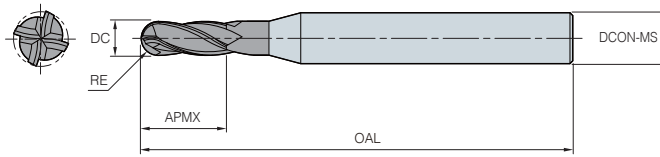

(mm)

Designation		DC	APMX	OAL	DCON-MS	RE
SBET 4	4040-050	4	8	50	6	2.0
	4040-070	4	8	70	6	2.0
	4050-060	5	12	60	6	2.5
	4050-080	5	12	80	6	2.5
	4060-060	6	12	60	6	3.0
	4060-090	6	12	90	6	3.0
	4080-070	8	16	70	8	4.0
	4080-100	8	16	100	8	4.0
	4100-075	10	20	75	10	5.0
	4100-100	10	20	100	10	5.0
	4120-080	12	25	80	12	6.0
	4120-100	12	25	100	12	6.0

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
	○	○	○	○		○	◎		○		

Super Endmill for HRSA

Features

- **Aerospace and generation industries** : Exclusive Endmill series for HRSA workpieces engine, turbine parts and etc.
- **Sharp cutting edge** : Reduced cutting load and suppressed work hardening
- **Longer tool life** : Applied high toughness substrate and new grade with high wear resistance

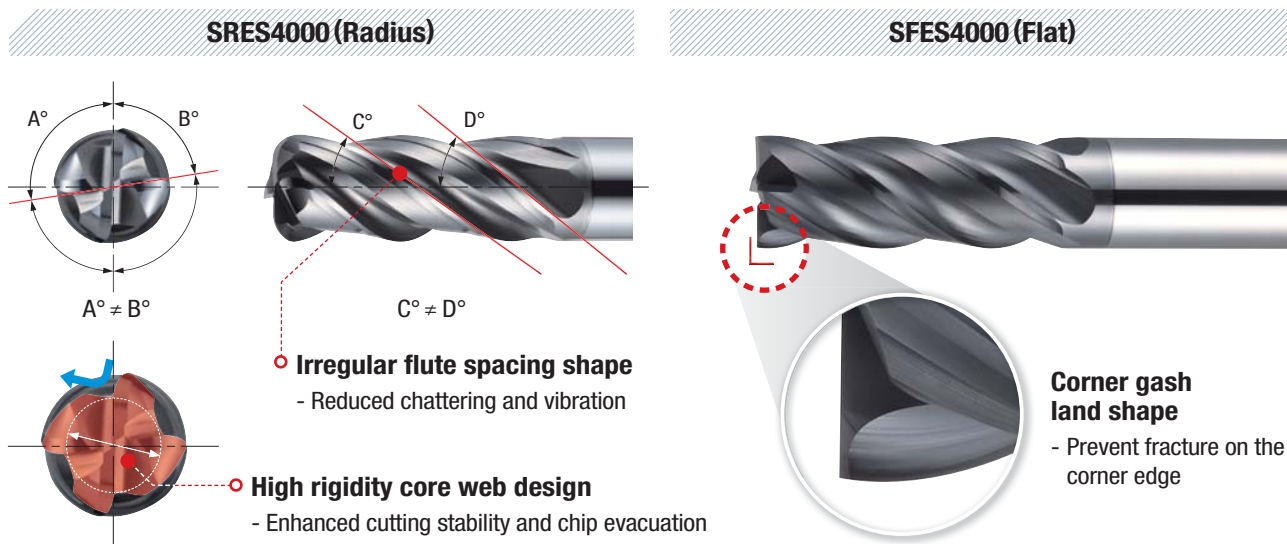

Cutting stability	
Workpiece	Inconel (Inconel718)
Cutting conditions	vc (m/min) = 60, fz (mm/t) = 0.04 ap (mm) = 5, ae (mm) = 0.3, wet (emulsion)
Tool	SRES4120-080-R20 (Diameter = Ø12 mm, SL coating)

High quality surface finish	
Workpiece	Waspaloy
Cutting conditions	vc (m/min) = 25, fz (mm/t) = 0.025 ap (mm) = 6, ae (mm) = 12, wet (emulsion)
Tool	SFES4120-080 (Diameter = Ø12 mm, SL coating)



[Super Endmill]



[Competitor]




[Super Endmill]



[Competitor]

Grade features

SL coating (Ultra Lubricating coating)







- Applied high lubrication coating and special surface treatment technology
- Increased welding resistance, chipping resistance and cutting stability by surface treatment technology

[SL coating application range]

◎ : Excellent ○ : Good

Workpiece	P					K	M	S		H	N
	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous
	Below HB225	HB225 ~325	HRC30 ~40	HRC40 ~45	HRC45 ~55	-	-	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HRC55 ~70	Copper, AL Graphite, Acryl, CFRP
SL coating								◎			

Recommended cutting conditions _ SFES4000 (Flat) / SRES4000 (Radius)


ISO	Workpiece				Brinell hardness (HB)	Specific cutting force (N/mm ²)	Tensile strength at high temp. (N/mm ²)	ap (mm)	ae (mm)	Machining	Diameter (mm)	3		4		5		6		8		10		12		16		20	
	Workpiece materials	ISO	AISI	8								10	15	15	20	25	30	42	48										
S	Fe series	A286 Inconel909	A286 Inconel909	275 270	74 100	750 680	1.5D	0.05D	Shouldering		vc	36	38	38	40	40	39	40	38	40									
											fz	0.014	0.020	0.025	0.030	0.035	0.043	0.050	0.069	0.079									
											rpm	3,800	3,000	2,450	2,100	1,600	1,250	1,050	765	635									
		feed	220	240	245	250					225	215	210	210	200														
		Ni series	Inconel718 Hastelloy Haynes282 Inconel625	Inconel718 Hastelloy Haynes282 Inconel625	360 220 230 210	100 86 143 66					720 720 660 720	0.3D	1D	Slotting		vc	24	24	24	24	24	24	24	24	24				
																fz	0.013	0.018	0.024	0.029	0.041	0.048	0.058	0.058	0.072				
	rpm						2,500	1,900	1,500	1,250						945	760	630	475	380									
	feed	125	135	145	145	155	145	145	110	110																			
	Ni series	ME16 Waspaloy RENE60	ME16 Waspaloy RENE60	325 350 385	100 143 100	880 650 660	1.5D	0.05D	Shouldering		vc					30	32	33	34	34	33	34	33	34					
											fz					0.014	0.020	0.025	0.030	0.035	0.043	0.050	0.069	0.079					
											rpm	3,230	2,550	2,083	1,785	1,360	1,063	893	650	540									
		feed	181	204	208	214					190	183	179	179	171														
Co series		Haynes25 Stellite31	Haynes25 Stellite31	285 475	114 143	670 700					0.3D	1D	Slotting		vc	20	20	20	20	20	20	20	20	20					
															fz	0.013	0.018	0.024	0.029	0.041	0.048	0.058	0.058	0.072					
	rpm						2,125	1,615	1,275	1,063					803	646	536	404	323										
feed	111	116	122	123	132	124	124	94	93																				

Performance evaluation

Inconel718 (HrC43-46)

Cutting conditions vc (m/min) = 40, fz (mm/t) = 0.05, ap (mm) = 18, ae (mm) = 0.6, wet (emulsion)

Tool SRES4120-080-R10 (Diameter = Ø12 mm, SL coating)

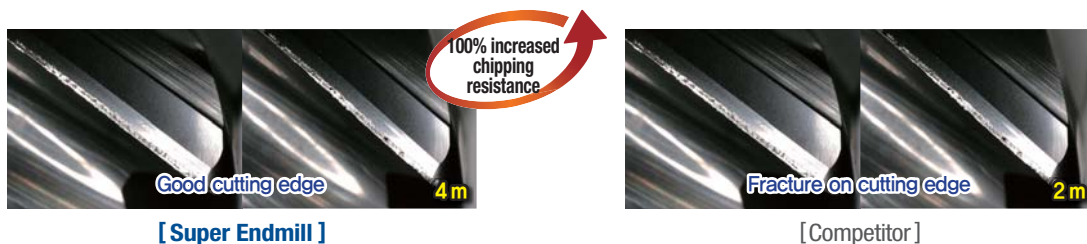

» High quality performance from high toughness substrate and cutting stability

Waspaloy (HrC36-38)

Cutting conditions vc (m/min) = 30, fz (mm/t) = 0.04, ap (mm) = 6, ae (mm) = 18, Trochoidal cutting, wet (soluble)

Tool SRES4120-080-R10 (Diameter = Ø10 mm, SL coating)




» High quality performance from high toughness substrate and cutting stability

Inconel718 (HrC43-46)

Cutting conditions vc (m/min) = 40, fz (mm/t) = 0.04, ap (mm) = 18, ae (mm) = 0.8, wet (emulsion)

Tool SFES4120-075 (Diameter = Ø12 mm, SL coating)

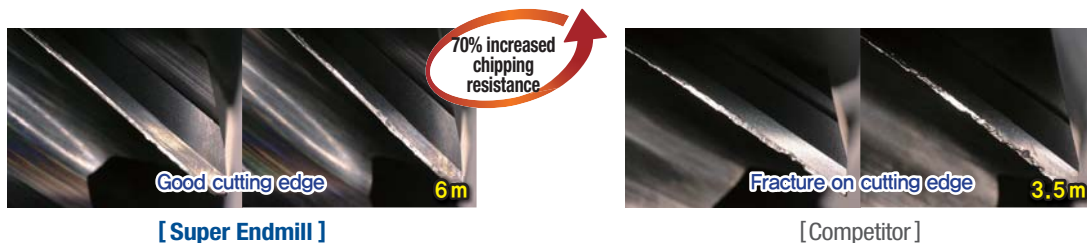


» High quality performance from high toughness substrate and cutting stability

SFES4000 (Flat)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

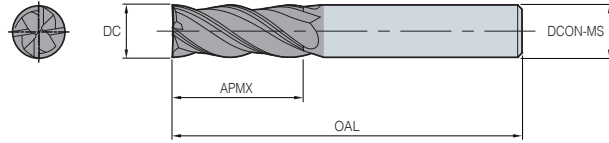

(mm)

Designation		DC	APMX	OAL	DCON-MS
SFES 4	4030-050	3	8	50	6
	4040-050	4	10	50	6
	4050-060	5	15	60	6
	4060-060	6	15	60	6
	4080-070	8	20	70	8
	4100-075	10	25	75	10
	4120-080	12	30	80	12
	4140-090	14	35	90	14
	4160-100	16	42	100	16
	4200-100	20	48	100	20

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

SRES4000(Radius)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

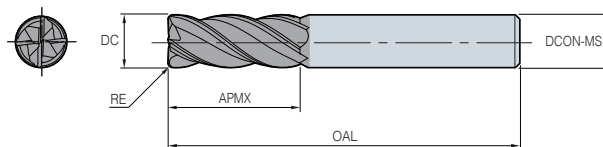

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRES 4030-055-R02	3	8	55	6	0.2
4030-055-R03	3	8	55	6	0.3
4030-055-R05	3	8	55	6	0.5
4040-055-R02	4	10	55	6	0.2
4040-055-R03	4	10	55	6	0.3
4040-055-R05	4	10	55	6	0.5
4040-070-R02	4	10	70	6	0.2
4040-070-R03	4	10	70	6	0.3
4040-070-R05	4	10	70	6	0.5
4050-055-R02	5	15	55	6	0.2
4050-055-R03	5	15	55	6	0.3
4050-055-R05	5	15	55	6	0.5
4050-090-R02	5	15	90	6	0.2
4050-090-R03	5	15	90	6	0.3
4050-090-R05	5	15	90	6	0.5
4060-060-R03	6	15	60	6	0.3
4060-060-R05	6	15	60	6	0.5
4060-060-R08	6	15	60	6	0.8
4060-060-R10	6	15	60	6	1.0
4060-060-R15	6	15	60	6	1.5
4060-060-R20	6	15	60	6	2.0
4060-090-R03	6	15	90	6	0.3
4060-090-R05	6	15	90	6	0.5
4060-090-R08	6	15	90	6	0.8
4060-090-R10	6	15	90	6	1.0
4060-090-R15	6	15	90	6	1.5
4060-090-R20	6	15	90	6	2.0

• Applicable workpiece range

◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

SRES4000(Radius)




H-A
35°/38°

h6
shank

SL
coating

RE
±0.01

DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

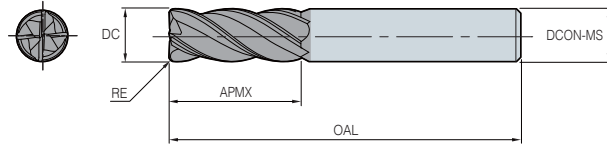

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRES					
4080-070-R03	8	20	70	8	0.3
4080-070-R05	8	20	70	8	0.5
4080-070-R08	8	20	70	8	0.8
4080-070-R10	8	20	70	8	1.0
4080-070-R15	8	20	70	8	1.5
4080-070-R20	8	20	70	8	2.0
4080-070-R25	8	20	70	8	2.5
4080-070-R30	8	20	70	8	3.0
4080-100-R03	8	20	100	8	0.3
4080-100-R05	8	20	100	8	0.5
4080-100-R08	8	20	100	8	0.8
4080-100-R10	8	20	100	8	1.0
4080-100-R15	8	20	100	8	1.5
4080-100-R20	8	20	100	8	2.0
4080-100-R25	8	20	100	8	2.5
4080-100-R30	8	20	100	8	3.0
4100-075-R03	10	25	75	10	0.3
4100-075-R05	10	25	75	10	0.5
4100-075-R08	10	25	75	10	0.8
4100-075-R10	10	25	75	10	1.0
4100-075-R15	10	25	75	10	1.5
4100-075-R20	10	25	75	10	2.0
4100-075-R25	10	25	75	10	2.5
4100-075-R30	10	25	75	10	3.0
4100-100-R03	10	25	100	10	0.3
4100-100-R05	10	25	100	10	0.5
4100-100-R08	10	25	100	10	0.8
4100-100-R10	10	25	100	10	1.0
4100-100-R15	10	25	100	10	1.5
4100-100-R20	10	25	100	10	2.0
4100-100-R25	10	25	100	10	2.5
4100-100-R30	10	25	100	10	3.0

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

SRES4000(Radius)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

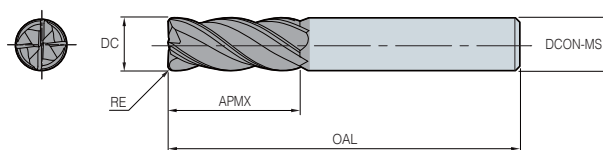

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRES					
4120-080-R05	12	30	80	12	0.5
4120-080-R08	12	30	80	12	0.8
4120-080-R10	12	30	80	12	1.0
4120-080-R15	12	30	80	12	1.5
4120-080-R20	12	30	80	12	2.0
4120-080-R25	12	30	80	12	2.5
4120-080-R30	12	30	80	12	3.0
4120-080-R35	12	30	80	12	3.5
4120-080-R40	12	30	80	12	4.0
4120-110-R05	12	30	110	12	0.5
4120-110-R08	12	30	110	12	0.8
4120-110-R10	12	30	110	12	1.0
4120-110-R15	12	30	110	12	1.5
4120-110-R20	12	30	110	12	2.0
4120-110-R25	12	30	110	12	2.5
4120-110-R30	12	30	110	12	3.0
4120-110-R35	12	30	110	12	3.5
4120-110-R40	12	30	110	12	4.0
4140-090-R05	14	35	90	14	0.5
4140-090-R08	14	35	90	14	0.8
4140-090-R10	14	35	90	14	1.0
4140-090-R15	14	35	90	14	1.5
4140-090-R20	14	35	90	14	2.0
4140-090-R30	14	35	90	14	3.0
4140-150-R05	14	35	150	14	0.5
4140-150-R08	14	35	150	14	0.8
4140-150-R10	14	35	150	14	1.0
4140-150-R15	14	35	150	14	1.5
4140-150-R20	14	35	150	14	2.0
4140-150-R30	14	35	150	14	3.0

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

SRES4000(Radius)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

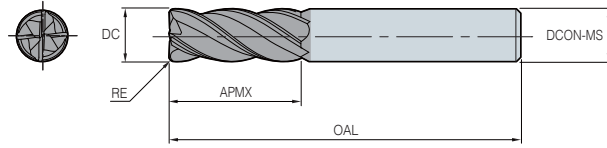

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRES					
4160-100-R05	16	42	100	16	0.5
4160-100-R08	16	42	100	16	0.8
4160-100-R10	16	42	100	16	1.0
4160-100-R15	16	42	100	16	1.5
4160-100-R20	16	42	100	16	2.0
4160-100-R25	16	42	100	16	2.5
4160-100-R30	16	42	100	16	3.0
4160-100-R35	16	42	100	16	3.5
4160-100-R40	16	42	100	16	4.0
4160-100-R50	16	42	100	16	5.0
4160-100-R60	16	42	100	16	6.0
4160-150-R05	16	42	150	16	0.5
4160-150-R08	16	42	150	16	0.8
4160-150-R10	16	42	150	16	1.0
4160-150-R15	16	42	150	16	1.5
4160-150-R20	16	42	150	16	2.0
4160-150-R25	16	42	150	16	2.5
4160-150-R30	16	42	150	16	3.0
4160-150-R35	16	42	150	16	3.5
4160-150-R40	16	42	150	16	4.0
4160-150-R50	16	42	150	16	5.0
4160-150-R60	16	42	150	16	6.0
4180-100-R05	18	45	100	20	0.5
4180-100-R08	18	45	100	20	0.8
4180-100-R10	18	45	100	20	1.0
4180-100-R15	18	45	100	20	1.5
4180-100-R20	18	45	100	20	2.0
4180-100-R30	18	45	100	20	3.0
4180-150-R05	18	45	150	20	0.5
4180-150-R08	18	45	150	20	0.8
4180-150-R10	18	45	150	20	1.0
4180-150-R15	18	45	150	20	1.5
4180-150-R20	18	45	150	20	2.0
4180-150-R30	18	45	150	20	3.0

• Applicable workpiece range


◎ : Excellent ○ : Good

Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

SRES4000(Radius)



DC	Tolerance
Ø3 ~ Ø6	0.000 ~ -0.015
Ø8 ~ Ø20	0.000 ~ -0.020

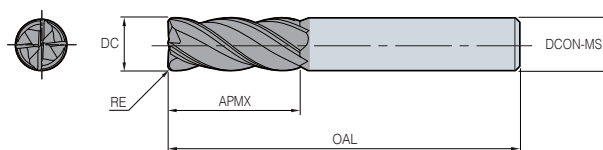

(mm)

Designation	DC	APMX	OAL	DCON-MS	RE
SRES 4200-100-R05	20	48	100	20	0.5
4200-100-R10	20	48	100	20	1.0
4200-100-R15	20	48	100	20	1.5
4200-100-R20	20	48	100	20	2.0
4200-100-R25	20	48	100	20	2.5
4200-100-R30	20	48	100	20	3.0
4200-100-R35	20	48	100	20	3.5
4200-100-R40	20	48	100	20	4.0
4200-100-R50	20	48	100	20	5.0
4200-100-R60	20	48	100	20	6.0
4200-150-R05	20	48	150	20	0.5
4200-150-R10	20	48	150	20	1.0
4200-150-R15	20	48	150	20	1.5
4200-150-R20	20	48	150	20	2.0
4200-150-R25	20	48	150	20	2.5
4200-150-R30	20	48	150	20	3.0
4200-150-R35	20	48	150	20	3.5
4200-150-R40	20	48	150	20	4.0
4200-150-R50	20	48	150	20	5.0
4200-150-R60	20	48	150	20	6.0

• Applicable workpiece range

◎ : Excellent ○ : Good


Workpiece	Carbon steel	Alloy steel	Pre-hardened steel	Hardened steel		Cast iron	Stainless steel	HRSA		High hardened alloy	Non-ferrous metal
	Below HB225	HB225 ~325	HrC30 ~40	HrC40 ~45	HrC45 ~55	GC	STS	Inconel718, Waspaloy, Hastelloy	Ti, Ti Alloy	HrC55 ~70	Copper, AL, Graphite, Acryl, CFRP
								◎			

⚠ For the safe metalcutting

- Use safety supplies such as protective gloves to prevent possible injury while touching the edge of tools.
- Use safety glasses or safety cover to hedge possible dangers. Inappropriate usage or excessive cutting condition may lead tool's breakage or even the fragment's scattering.
- Clamp the workpiece tightly enough to prevent its movement while its machining.
- Properly manage the tool change phase because the inordinately used tool can be easily broken under the excessive cutting load or severe wear, and it may threat the operator's safety.
- Use safety cover because chips evacuated during cutting are hot and sharp and may cause burns and cuts. To remove chips safely, stop machining, put on protective gloves, and use a hook or other tools.
- Prepare for fire prevention measures as the use of the non-water soluble cutting oil may cause fire.
- Use safety cover and other safety supplies because the spare parts or the tools can be pulled out due to centrifugal force while high speed machining.



Head Office: Holystar B/D, 326, Seocho-daero, Seocho-gu, Seoul, 06633, Republic of Korea
Tel: +82-2-522-3181 Fax: +82-2-522-3184, +82-2-3474-4744 Web: www.korloy.com E-mail: sales.khq@korloy.com

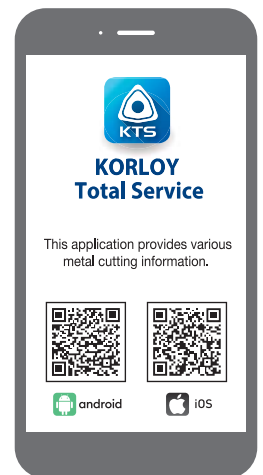

KORLOY AMERICA

620 Maple Avenue, Torrance, CA 90503, USA
Tel : +1-310-782-3800 Toll Free : +1-888-711-0001 Fax : +1-310-782-3885
E-mail : sales.kai@korloy.com

KORLOY INDIA

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India
Tel : +91-124-4391790 Fax : +91-124-4050032
E-mail : sales.kip@korloy.com

KORLOY TURKIYE

Serifali Mahallesi, Burhan Sokak NO: 34
Dudullu OSB/Umraniye/Istanbul, 34775, Turkey
Tel : +90-216-415-8874 E-mail : sales.ktl@korloy.com

KORLOY RUSSIA

123242, Moscow, vn.ter.g. municipal district Presnensky,
per Kapranova, house 3 building 3, premises 1/3
Tel : +7-495-280-1458 Fax : +7-495-280-1459 E-mail: tech.sales@korloy.ru

KORLOY FACTORY INDIA

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India
Tel : +91-124-4391790 Fax : +91-124-4050032
E-mail : pro.kim@korloy.com

KORLOY EUROPE

Gablonzer Str. 25-27, 61440 Oberursel, Germany
Tel : +49-6171-277-83-0 Fax : +49-6171-277-83-59
E-mail : sales.keg@korloy.com

KORLOY BRASIL

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,
CEP06460-010, SP, Brasil
Tel : +55-11-4193-3810 E-mail : sales.kbl@korloy.com

KORLOY CHILE

Av. Providencia 1650, Office 1009, 7500027
Providencia-Santiago, Chile
Tel : +56-229-295-490 E-mail : sales.kcs@korloy.com

KORLOY MEXICO

Avenida de las ciencias, No.3015, Interior 507, Juriquilla, Santa Fe,
Queretaro, Queretaro, C.P. 76230
Tel: +52-442-673-7388 E-mail: sales.kml@korloy.com

